


Higher accuracy produces greater profitability

YASDA MICRO CENTER

**YMC 650**

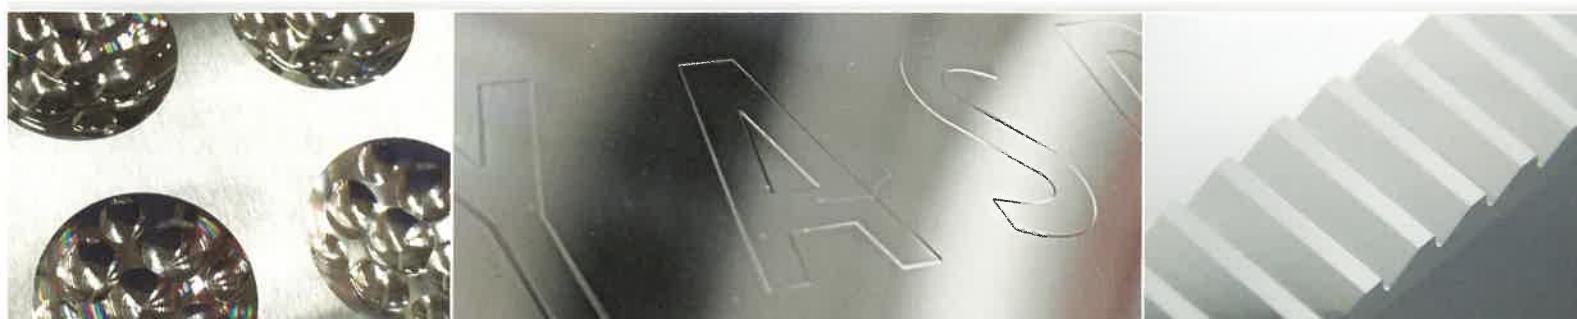

## Linear Motor Drive

New technologies for micro high speed machining targeting sub-micron accuracy  
Reliable spindle and construction to avoid thermal distortion

E

**YASDA**

**YMC 650**

# YMC 650

Renewed human machine interface (HMI) and new **OpeNe** software connect human and machine, adaptable to a wide range of micro and high precision machining.

YASDA Micro Center YMC650 is a cutting edge high-end machine which allows a wide range of high accuracy and surface quality machining. It inherits the features of YASDA's bestselling machine YMC430 and at the same time, has expanded strokes.


To deliver highly accurate and long hour machining, all necessary elements such as the linear drive on all axes and measures against thermal displacement are implemented on a highly rigid machine body.

In addition, included is the new YASDA OpeNe software that provides intuitive control, self-diagnosis and analysis in a simple format.

YMC650 will open a new field of micro and high precision machining.



1 YASDA MICRO CENTER YMC650

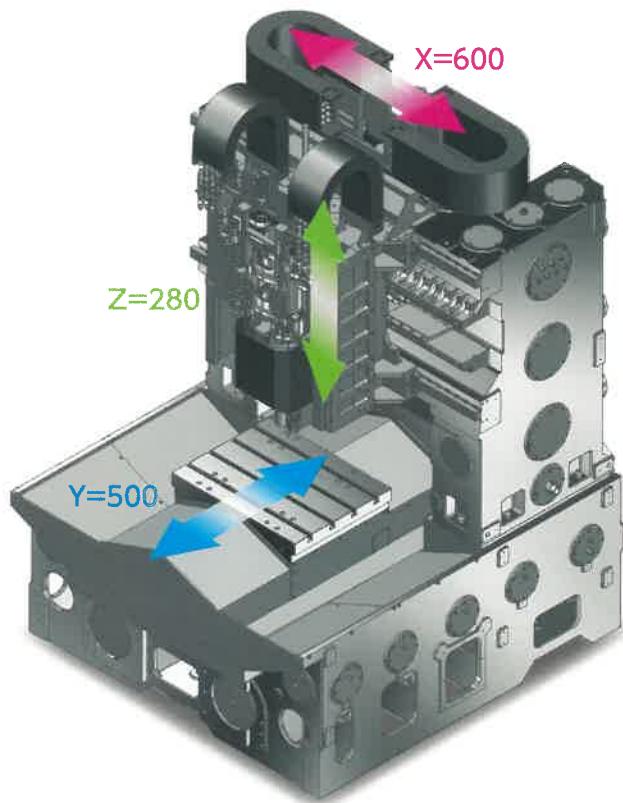

## Machine specification



Travel(X/Y/Z)	600/500/280mm
Table working surface	700x550mm
Table loading capacity	200kg
Rapid traverse rate	20,000mm/min
Cutting feed rate	12,000mm/min
Drive system	All axes controlled by linear motor drives.
Least input increment	0.01µm
Scale feedback of all axes	0.001µm

## Spindle specification

Spindle speed range	200~40,000min <sup>-1</sup>
Tool shank type	HSK-E32
Spindle drive motor	7.5kW(continuous)
Torque	1.8Nm(continuous)

### Spindle power and torque diagram

— Spindle power    — Spindle torque

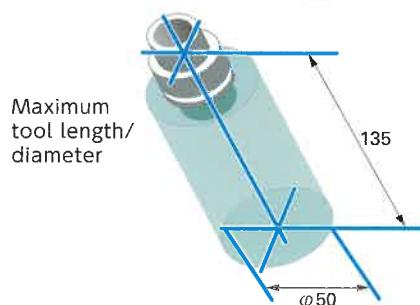
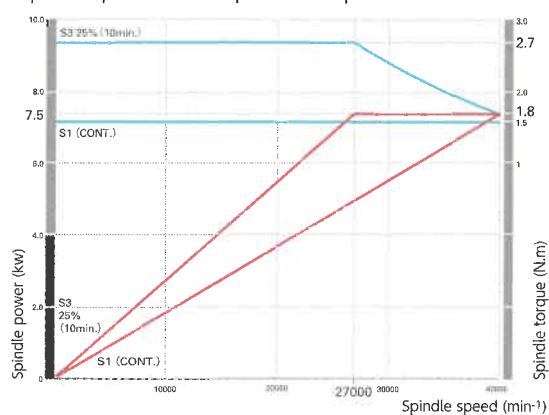


## High Rigidity

### Super rigid machine structure

High rigidity is necessary even for a machine specializing in micro machining. This super rigid machine structure allows high servo gain and highly responsive control of the machine by increasing resonant frequency.

The super rigid machine frame is composed of a rigid box shaped column and bed which are thoroughly analyzed by FEM and firmly assembled on carefully hand scraped mating faces.

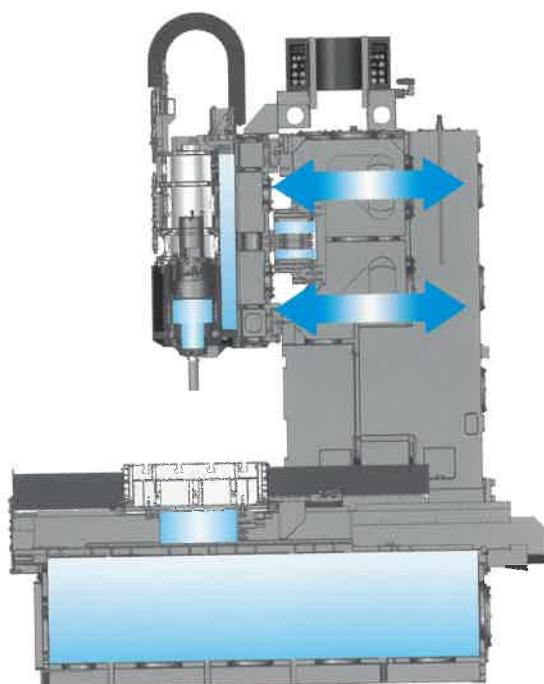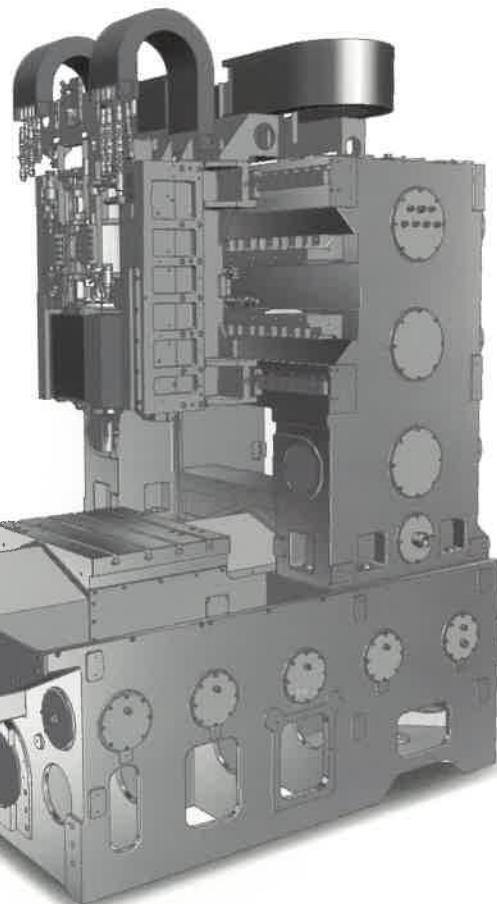


### Thermal distortion stabilizing system

This system circulates temperature controlled fluid in the column, inside of the spindle head, in the X-axis saddle and linear motors, as well as in the bed which is placed on a floor where temperature changes frequently. This allows stable, high accuracy machining by minimizing thermal distortion caused by temperature change of the factory and self-heating.

### Symmetrical cylindrical spindle head

The new symmetrical cylindrical spindle head inherits YMC430's design concept which is resistant to thermal distortion in X and Y directions. The new structure improves the rigidity and responsiveness of the machine by reducing the weight of the Z-axis.



The center of the axis is maintained, even if the frame of the spindle expands.

Synchronized with the machine temperature cooled oil is circulated in the spindle head. This system sustains high precision machining over a long period.



## 32 tool-ATC (standard)

The ATC unit utilizes an armless type automatic tool changer that directly changes tools by moving the tool magazine along its stroke. A 90-tool ATC (optional), which has a larger capacity, requires virtually the same installment space as the 30-tool ATC. Therefore, the 90-tool ATC can be installed without increasing the machine space.






## 90 tool-ATC (optional)




### OUTLINE

unit:mm

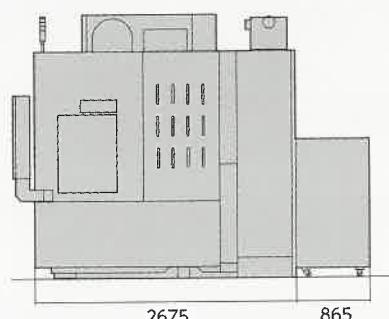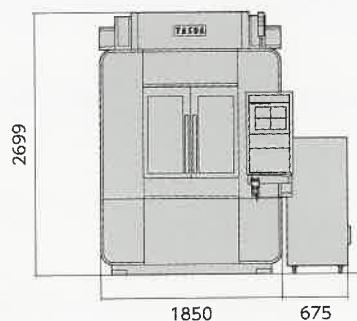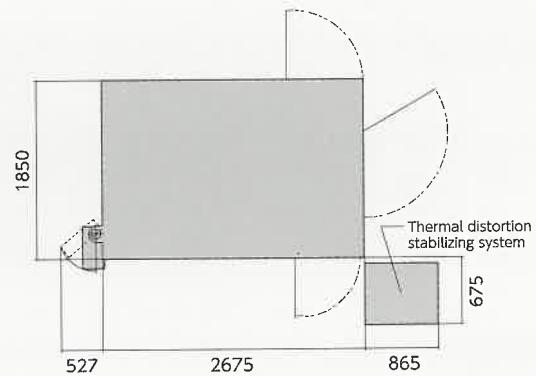


## High stability

### Positioning accuracy

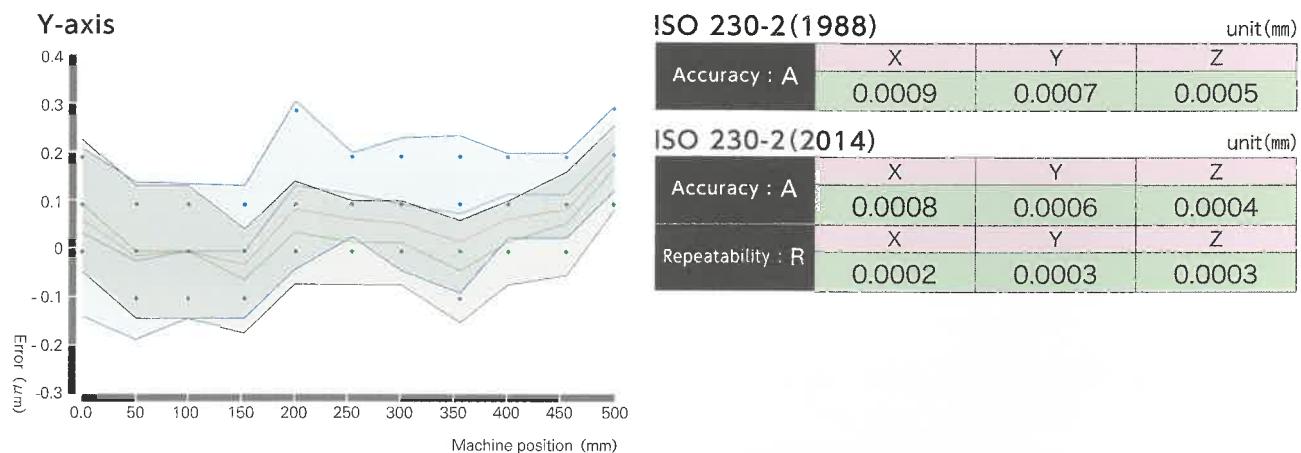


### Motion performance data (X-Y axis)

X-Y R50 F1000  
CIRCULARITY 0.98 $\mu\text{m}$

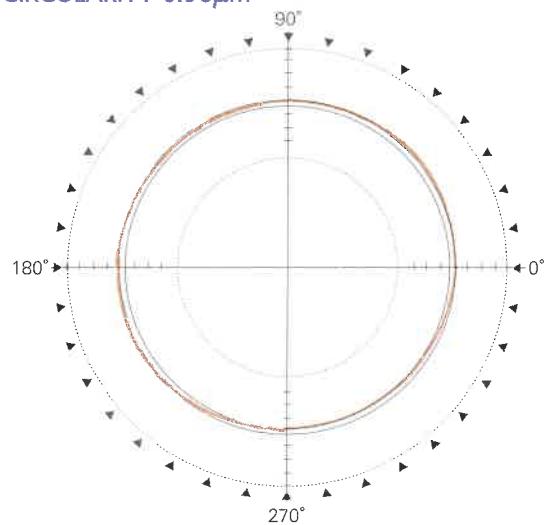


X-Z R0.5 F100  
CIRCULARITY 0.55 $\mu\text{m}$

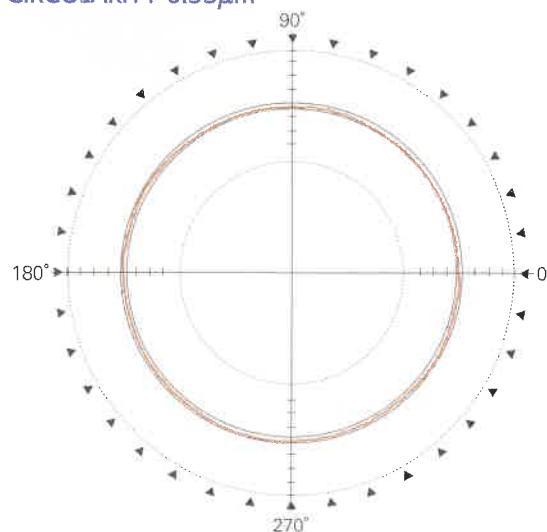

### X axis Straightness in vertical direetion (EXZ)

0.17 $\mu\text{m}/100$  Measurement by a 100 mm optical flat

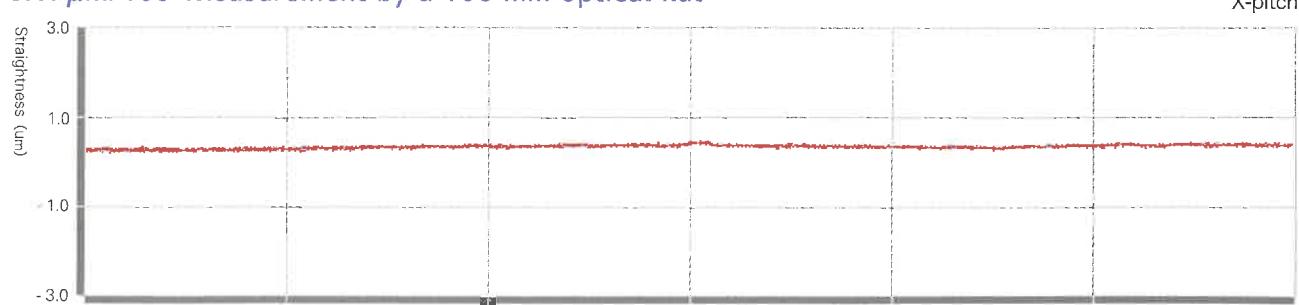


Renewed HMI and New OpeNe  
Connecting Human and Machine

# NEW OpeNe

With a new display design and touch panel,  
operability and visibility are improved which  
greatly helps the operator.

## EZ operation

Home screen of new OpeNe

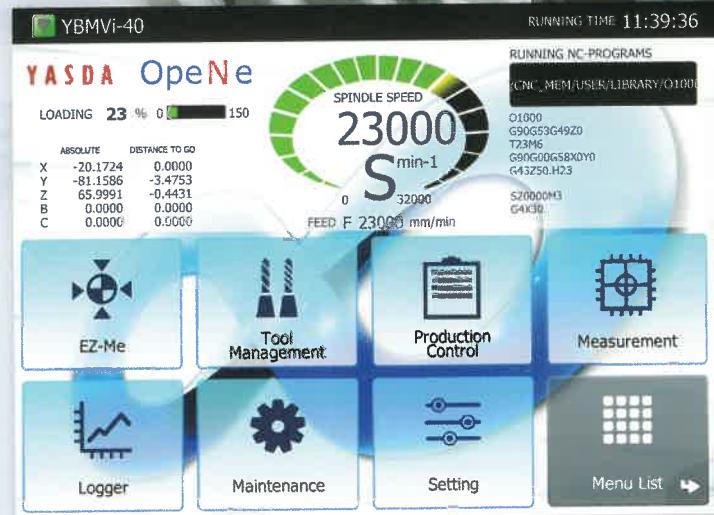

## Edge Computing

New OpeNe collects and accumulates data for analysis in a suitable format during the machine operation.



- Offset information
- Measuring information
- Alarms
- Information of each axis
- Information of operation

Collecting, accumulating and analyzing data


## Self Diagnosis

The new OpeNe helps scheduling of machine maintenance by using anomaly detection and monitoring the condition of the consumable parts.

Monitoring the machine condition



- Operation condition
- Information of axes

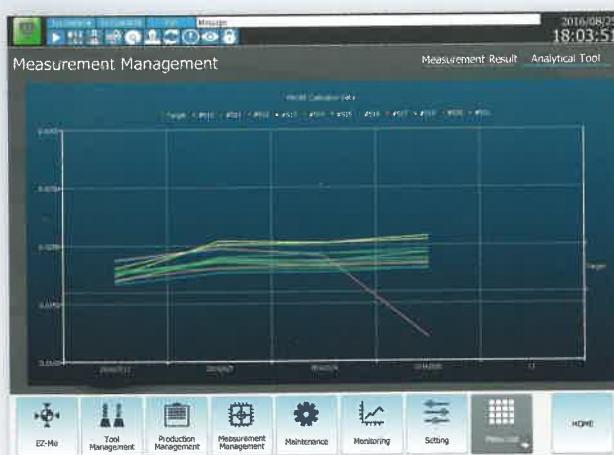

Date	Program Name	Description	Info
2016/12/24 12:24	YBM_711 Spindle unit 34 /CNC_M1/M/US/R/LIBRARY/1.scr	Probe Calibration	-
2016/12/24 12:24	MDI	Tool Setter Calibration	-
2016/12/24 12:24	MDI	T12 Tool Measurement	H12 D12
2016/12/24 12:24	MDI	T13 Tool Measurement	H13 D13
2016/12/24 12:24	MDI	T13 Tool Measurement	-
2016/12/24 12:24	EZ_CAL G100	-	-
2016/12/24 12:24	I-CAL 09865	-	-
2016/12/24 12:24	O1234 /CNC_M1/M/US/R/LIBRARY	Z Surface Measurement	G57
2016/12/24 12:24	O1234 /CNC_M1/M/US/R/LIBRARY	XY Boss Measurement	G57
2016/12/24 12:24	O1234 /CNC_M1/M/US/R/LIBRARY	Z Surface Measurement	G57

## 1. Base machine specifications

1) Travel	X-axis travel (Cross movement of spindle head)	600mm
	Y-axis travel (Longitudinal movement of table)	500mm
	Z-axis travel (Vertical movement of spindle head)	280mm
	Distance from table surface to spindle nose face	135~415mm
2) Spindle	Spindle speed range	200~40,000min <sup>-1</sup>
	Spindle drive motor	AC7.5kW(Continuous)
	Spindle taper	HSK-E32
3) Table	Table working surface	700mm×550mm
	Table loading capacity	200kg
	Table surface configuration	4T-slots, width 18 mm H7, pitch 125 mm
4) Feed rate	Rapid traverse rate	20,000mm/min
	Cutting feed rate	Max. 12,000mm/min
	Least input increment	0.01μm
5) ATC	Tool shank type	HSK-E32
	Tool storage capacity	32tools
	Maximum tool dia. / length / mass	φ50mm/135mm/500g
6) Mass of machine		Approx. 9,000kg
7) Electric power requirement		30kVA
8) CNC unit		FANUC 31i-B5

## 2. Standard equipment

1) Optical scale feed back	0.001μm
2) Washing gun	1 (Operator position)
3) Splash guard	Manual door with roof and one LED light
4) Spindle thermal displacement compensation	Standard data

## 3. CNC standard options

1) Least input/travel increment	0.01μm
2) Display	15"LCD
3) Program storage length	320m (128KB)
4) Custom macro	Common variable: 100
5) Number of registerable programs	250
6) Automatic corner override	
7) Tool offset pairs	32 pairs
8) Tool offset memory	Memory C
9) Run hour and parts count display	
10) Extended part program editing	
11) USB memory interface	Data input / output
12) Background editing	

## 4. Optional equipment

1) Number of additional stored tools	90 tools
2) Signal tower (Multilayer signal lamp)	Red, yellow, green (Flashing)
3) Cutting liquid temperature control unit	
4) External mist coolant	Manufactured by Bluebe / 2 nozzles
5) Oil skimmer	Oil Pure
6) Cutting oil unit (AA type)	2 nozzles
7) Mist collector	Mistresa
8) Automatic tool length compensation and tool breakage sensor	BLUM/NT type
9) Tool length/radius compensation and tool breakage sensor	BIG Daishowa / Dyna Vision Pro
10) Tool length/radius compensation and tool breakage sensor	Daishowa / Dyna Line
11) Automatic measuring system	Manufactured by Renishaw / Touch probe OMP400
12) High-speed machining function (YASDA HAS-3 system)	Maximum feed rate 12,000mm/min
13) Thermal distortion stabilizing system	With weekly timer
14) Weekly timer	
15) Spindle thermal displacement compensation	
16) AWC door	
17) Robot interface	Compatible with System 3R and EROWA

## 5. CNC Options

1) Part program storage	Total: 256KB, 512KB, 1MB, 2MB, 4MB, 8MB
2) Extensional number of registerable programs	Total: 500, 1,000, 2,000, 4,000
3) Helical interpolation	G02·03
4) Conical/spiral interpolation	G02, G03 (Helical interpolation is required.)
5) Inch/metric conversion	G20, G21
6) Scaling	G50, G51
7) Coordinate rotation	G68, G69
8) Programmable mirror image	G50.1, G51.1
9) Rigid tap	M29(G84, G74)
10) Optional block skip	Total: 9
11) Tool offset pairs	Total: 64, 99, 200, 400, 499, 999 sets
12) Custom macro common variable	Total: 600
13) Addition of workpiece coordinate	48 sets, 300 sets
14) Tool management	
15) Normal direction control	G40.1, G41.1, G42.1
16) Cs contouring control	
17) Ethernet function	FOCAS2 / Ethernet
18) Data server function	Fast data server, Capacity: 1GB

# YASDA

YASDA PRECISION MACHINING CO., LTD.  
www.yasda.co.jp

Main Office & Factory  
1160Hamanaka,Saitama  
PHONE: +81/865-64

Representative Office  
Schiesstr. 35, D-4055  
PHONE: +49/211-59

\*Export of the products are  
the Japanese government



ITI CORPORATION  
日商愛帝愛股份有限公司  
<http://www.iti-taipei.com.tw>

ITI總公司: OSAKA, JAPAN

台北分公司  
台北市中山區104中山北路1段66號4F  
TEL : 886-2-2567-1525

FAX : 886-2-2567-1527  
E-Mail : richiti@ms47.hinet.net

台中事務所  
台中市北屯區406文心路4段639號13F-2  
TEL : 886-4-2246-1873  
FAX : 886-4-2246-1874  
E-Mail : iti-chien@hotmail.com.tw

上海事務所  
上海市徐匯區斜土路2601號嘉匯廣場T2座23樓D室  
TEL : 86-21-6487-4587

FAX : 86-21-6487-2761  
E-Mail : iti\_shanghai@sh163.net

東莞(長安)事務所  
中國廣東省東莞市长安鎮蓬峰路80號华丽大厦6樓A区2号  
TEL : 86-769-8228-5545-6  
FAX : 86-769-8228-5549  
E-Mail : richiti@ms47.hinet.net

RATION  
. IL 60007, U.S.A.  
9-0260

AI)  
C),  
36, China  
1700970

523850, China  
-82283086