


# HYDRAULIC NOTCHING MACHINE



STURDY WORKHEAD, CONICAL GROOVES WITH SET OF GONIOMETRY SQUARES ON RIGID CAST IRON WORKTABLE.

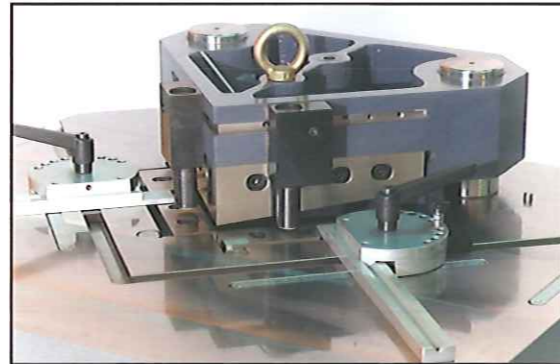

SAFETY POWER ON/OFF.



LATERAL MECHANICAL HOLDDOWN IS STANDARD EQUIPMENT.

## HY-4

### HY-4 SPECIFICATION


Maximum capacity mild steel	4 mm
Max. notch	220 x 220 mm
Ram stroke	25 mm
Stroke per minute	35 spm
Motor	3 HP
Shipping weight	450 kgs
Packing size	1000 x 900 x 1350 mm

### OPTIONAL ACCESSORY:

- FRONT SLIDING SUPPORTER FOR OVERSIZE WORKPIECE.
- INTERNAL STOP-ROD WITH DUAL SCALE FROM BACK SIDE.

• The above specifications subject to change without prior notice.

### WORKING METHOD: NOTCHING

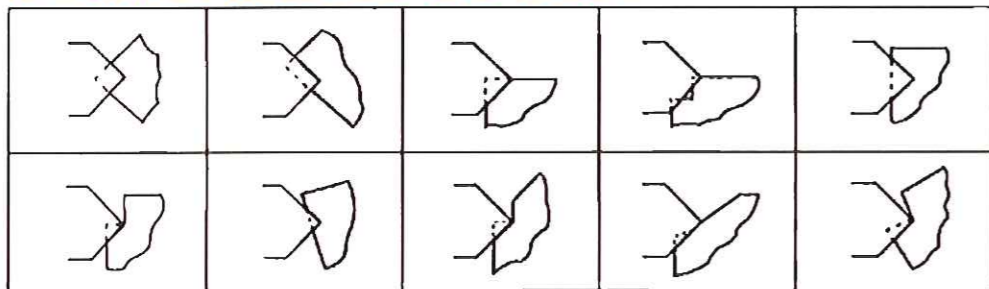

## Collection of Sheet Metal Machines

- HYDRAULIC NOTCHING MACHINE
- LOCK FORMING MACHINE
- POWER SLITTER
- HAND OPERATED SWAGER
- ROTARY CLADDING MACHINE
- HAND NOTCHER



**FINTEK INDUSTRY COMPANY LIMITED**

P.O. BOX 1481 TAIPEI, TAIWAN.

TEL: +886-2-2523-6891

<http://www.fintekwell.com.tw>

FAX: +886-2-2523-5419

E-mail: [fintek.tw@gmail.com](mailto:fintek.tw@gmail.com)



20150204



[www.fintekwell.com.tw](http://www.fintekwell.com.tw)