

ACCESSORIES

STANDARD ACCESSORIES

- CNC controller ---1
- Linear scale (for X & C axes) ---2
- Fully enclosed splash guard ---1
- Grinding wheel and grinding wheel flange ---1
- Diamond tool holder (table mounted type) ---1
- Grinding wheel dismount tool ---1
- Carbide tipped work centers ---2
- Coolant tank with pump ---1
- Hydraulic tank with pump ---1
- Work lamp ---1
- Tools and kits ---1

OPTIONAL ACCESSORIES

- Cam locked driving dogs
- Work holder
- 2-point steady rest
- Adjustable 3-jaw scroll chuck (with mounting plate)
- Magnetic coolant separator
- Paper filter
- Automatic grinding wheel balancer
- Wheel balancing stand and arbor
- Touch probe gauge
- Diamond roller dressing device
- Gap and crash control
- Oil mist collector
- CBN wheel
- CAD/CAM software
- Spare grinding wheel flange
- Hydraulic tailstock



**PRECISION
PERFECTION
EXCELLENCE**

www.grinding.com.tw

PALMARY PRODUCTS

- Centerless Grinder
- Cylindrical Grinder
- Internal Grinder
- Vertical Grinder
- Surface Grinder
- Special Purpose Grinder



PALMARY MACHINERY CO., LTD.
No. 77, Gongye Rd., Dali Dist.
Taichung City 41280, Taiwan.
Tel: +886-4-2492-9799
Fax: +886-4-2492-9499
E-mail: palmary@grinding.com.tw



1711N1

www.grinding.com.tw

CNC CYLINDRICAL GRINDER CAM TYPE


OCD-CAM CNC series



PALMARY
PALMARY MACHINERY CO., LTD.




FAGOR CONTROLLER

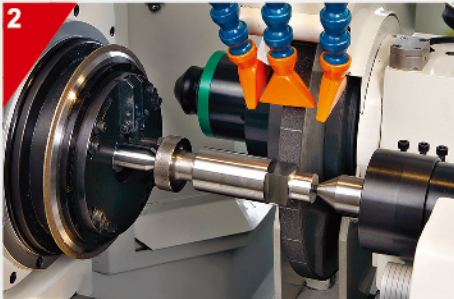


DIAMOND ROLLER DRESSING
DEVICE (optional)

- Workspindle mounted type (metal bond)
- Acuminate profile roller type (diamond arranged)

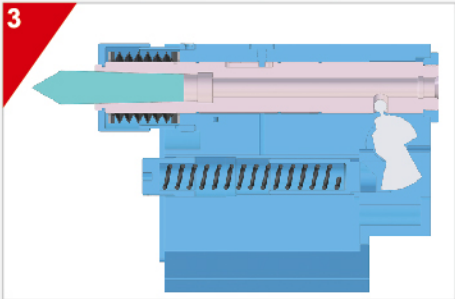

TAILSTOCK LUBRICATION
SYSTEM SIMPLIFIES
MAINTENANCE

An automatic oil bath lubrication system has been provided for the tailstock to maintain high-level accuracy. An oil level gauge enables quick and sure oil level checks.

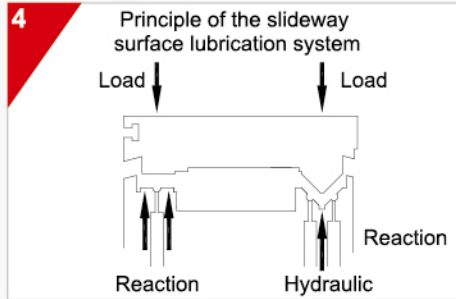

ADVANCED HYDRO-STATIC
LUBRICATION SYSTEM

The table slideway is lubricated by an advanced automatic hydro-static lubrication system. This provides extremely smooth movement.

[OCD-3260CAM]

FEATURES

- Main structure of the CNC cylindrical grinder, when in combination with angle control of spindle by C axis (built-in spindle motor), is capable of grinding various special shaped workpiece.
- Working spindle carried with precision angle decoder, high resolution of angle control reaching up to 0.1um.
- The feed axis is driven by linear motor and equipped with close loop control optical scale to reach high precision.
- Retaining various functions of CNC cylindrical grinder, and applicable to angle and speed control.
- Fast and easy transferring custom-made grinding program, when operated with PALMARY-developed CAD/CAM software (optional).

- A high-speed algorithm controller executed under PC Based + Windows XP, allowing input of 3rd-party software.
- An optional gap and crash control, consistent grinding operations are ensured. Another benefit is to prevent parts colliding caused by erroneous motion when executing programs.
- The optional diamond roller dressing device for workspindle mounted type (metal bond) or acuminate profile roller type (diamond arranged) is equipped according to functional requirement.
- USB access, combined with the market available USB high-speed transmission interface, providing excellent data portability.
- With 1ms single session processing time.



[OCD-3225CAM]


SPECIFICATIONS

OCD-CAM

MODEL	OCD-3225CAM	OCD-3240CAM	OCD-3260CAM	OCD-32100CAM
Capacity	Swing over table			
	Distance between centers			
	Max. grinding diameter			
	Max. load held between centers			
Wheel	O.D. x Width x I.D.			
	Linear velocity			
	Speed			
	Rapid feed rate			
Wheelhead	Min. input increment			
	Rapid feed rate			
Table	Min. input increment			
	Swivelling angle			
	Center			
Workhead	Speed			
	Cam grinding speed			
	Max. load of spindle (tool holder included)			
	Center			
Tailstock	Tailstock stroke			
	Controller			
Motor	Wheel spindle			
	Work spindle			
	Wheelhead feed			
	Table feed			
	Hydraulic pump			
	Wheel spindle lubricant			
	Coolant pump			
Tank	Lubrication oil tank (table)			
Capacity	Hydraulic (for accessory)			
Machine Weight	Net weight			
	3400 kg			

• The mentioned specifications & dimensions are subject to change without notice.

MACHINE DIMENSIONS

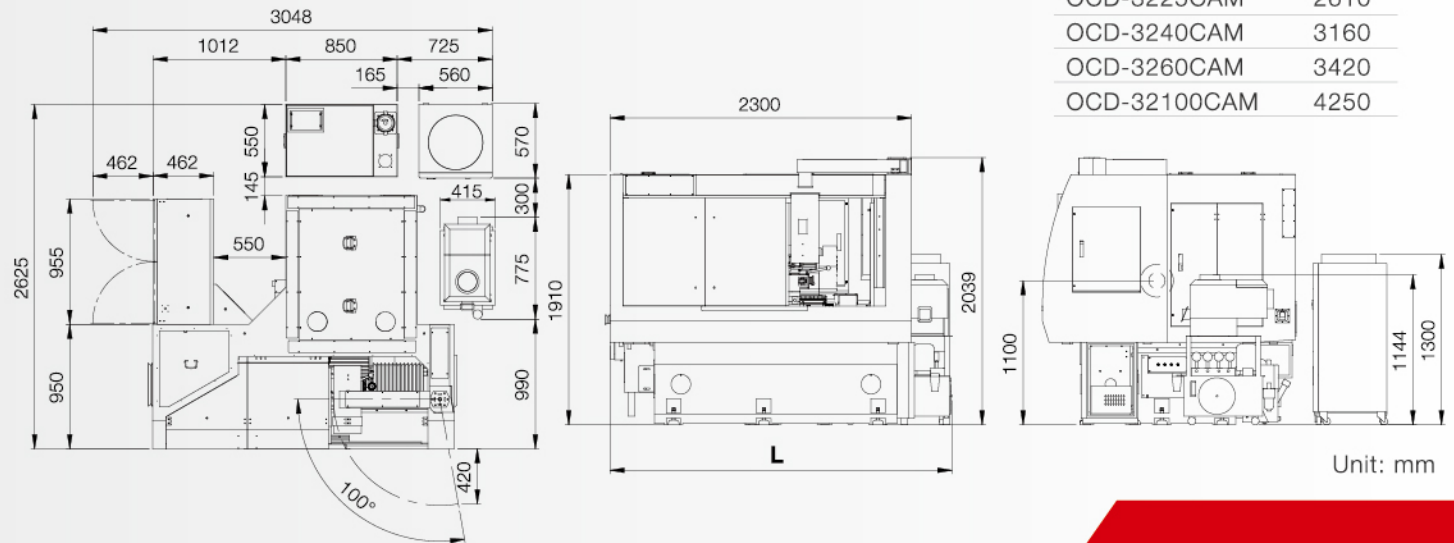

MODEL	L
OCD-3225CAM	2610
OCD-3240CAM	3160
OCD-3260CAM	3420
OCD-32100CAM	4250