


# GS-61 Twist Drill & End Mill Resharpener

**Super Simple**  
**Super Easy**  
**Super Fast**  
**Super Efficiency**



- For  $\Phi 2\text{mm} - 13\text{mm}$  Twist Drill Resharpener  
Adjustable Point Angle  $90^\circ - 140^\circ$
- For  $\Phi 3\text{mm} - 12\text{mm}$  End Mill Resharpener  
Adjustable Cutting Face Angle and Width

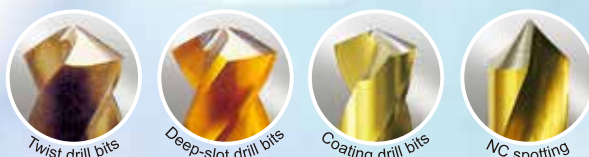

Model	GS-61	
Grinding Type	End Mill	Twist Drill
Drill Diameter	$\Phi 3 \sim 12\text{mm}$	$\Phi 2 \sim 13\text{mm}$
Point Angle		$90^\circ \sim 140^\circ$
Power Supply	AC110V 50/60Hz / AC220V 50Hz Single-Phase(Opt.)	
R.P.M of Motor	5300 R.P.M.	
Grinding Wheel	SD#200 x 1(C)	CBN #200 (For HSS)
Weight	N.W. 14.115 Kg / G.W. 16.435 Kg	
Machine Size	L:315 mm, W:255 mm, H:255 mm	
Packing Size	L:390 mm, W:280 mm, H:360 mm	
Type of Thinning	X Thinning	
Standard Accessories	Collet x 13pcs (2,3,4,5,6,6.7,8,9,10,11,12,13mm)	
	SD#200 x 2(A,B)	
	Bushing x 4pcs	
	Chuck x 4 pcs(3 Fronts, 1 Back)	Chuck x 2pcs (1 Front, 1 Back)
	Metal Shim 3pcs (0.1mm x 2, 0.3mm x 1)	
Optional Accessories	Hexagon Wrench 3mm x 1, 4mm x 1	
	CBN#200 Wheel(A)(3.0-5.0mm) For HSS	SD #200 (For Carbide)
	CBN#200 Wheel(B)(5.1-8.0mm) For HSS	
	CBN#200 Wheel(C)(8.1-12.0mm) For HSS	



TAIWAN MORE-CASH VILLAGE CORPORATION  
 No. 81, Ren Hua Rd., Ta-Li Dist., Taichung City 412, Taiwan R.O.C.  
<http://gsc-tw.com> e-mail:website@gsc-tw.com  
 TEL : (886) 4-2491-0441 FAX : (886) 4-2491-7430

