


NC

兩節式經濟型萬向接頭



NC-※※-00A

附屬品：強力銷、固定銷各1支、扣環2個
追加工不可

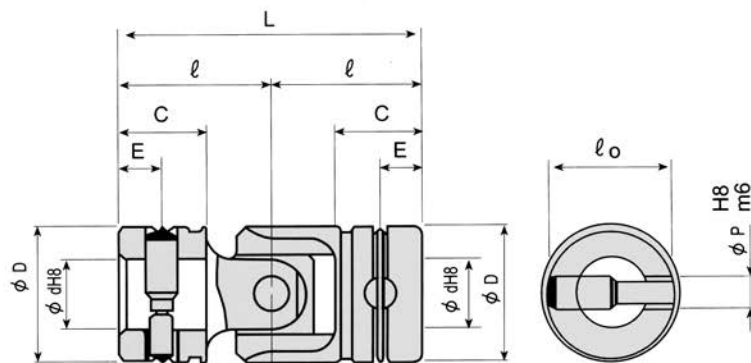



NC-※※-01A

附屬品：
強力銷1支、扣環2個
追加工不可





NC-※※-02A

附屬品：
扣環2個
追加工不可




NC-※※-05A

手動專用無熱處理
追加工可能



NC-※※-※※C

附防塵套
已充填油脂
訂購時請預先說明



單位：mm

型號	尺寸	d	D	C	E	l	L	P	l ₀	b	T	M	G
NC-06-※※※		6	12	9	4.5	15.5	31	3	10	—	—	—	—
NC-08-※※※		8	15	10	5	18	36	3.5	12.5	—	—	—	25
NC-10-※※※		10	20	12	6	21	42	4.5	16.5	—	—	—	32
NC-12-※※※		12	23	15	7.5	26	52	5	20.5	4	13.5	5	35
NC-14-※※※		14	26	17	8.5	29.5	59	5.8	23	5	16	6	40
NC-16-※※※		16	30	22	11	37	74	6.5	26.5	5	18	6	46
NC-18-※※※		18	33	23.5	11.75	40.5	81	7	28.5	5	20	6	52
NC-20-※※※		20	36	25	12.5	43.5	87	8	31.5	5	22	6	58
NC-25-※※※		25	44	30	15	52.5	105	10	38.5	7	28	8	68
NC-30-※※※		30	51	35	17.5	61	122	11.5	44	7	33	8	82

註：未標示的尺寸與NC-※※-00A相同


NC型無貯油設計，可使用防塵套（內充油脂），初期運轉時須定期給油，給油時在接頭部外圍塗布油脂，油脂以#90潤滑油較好。

ND

三節式經濟型萬向接頭


ND-※※-00A

附屬品：強力銷、固定銷各1支、扣環2個
追加工不可

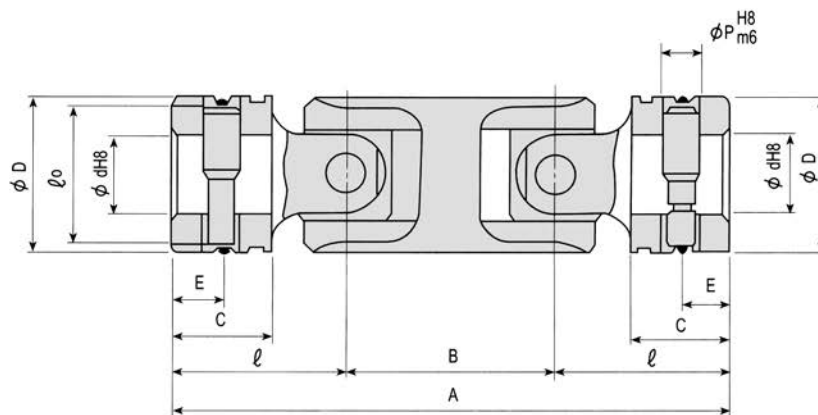


ND-※※-01A

附屬品：
強力銷1支、扣環2個
追加工不可

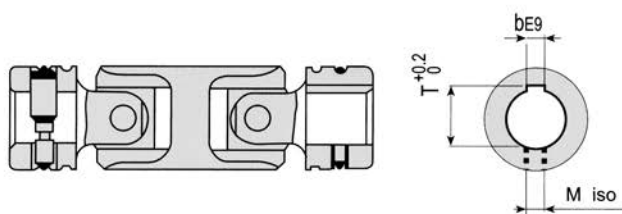


ND-※※-02A

附屬品：
扣環2個
追加工不可

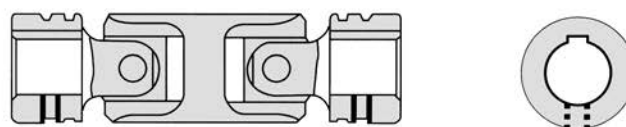


ND-※※-05A

手動專用無熱處理
追加工可能

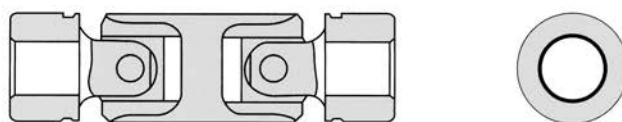

ND-※※-※※C

附防塵套
已充填油脂
訂購時請預先說明

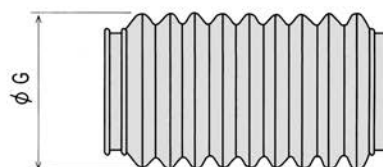

單位：mm

型號	尺寸	d	D	C	E	l	B	A	P	l ₀	b	T	M	G
NC-06-※※※		6	12	9	4.5	15.5	18.5	49.5	3	10	—	—	—	—
NC-08-※※※		8	15	10	5	18	22	58	3.5	12.5	—	—	—	25
NC-10-※※※		10	20	12	6	21	25.5	67.5	4.5	16.5	—	—	—	32
NC-12-※※※		12	23	15	7.5	26	31	83	5	20.5	4	13.5	5	35
NC-14-※※※		14	26	17	8.5	29.5	35.5	94.5	5.8	23	5	16	6	40
NC-16-※※※		16	30	22	11	37	43.5	117.5	6.5	26.5	5	18	6	46
NC-18-※※※		18	33	23.5	11.75	40.5	48	129	7	28.5	5	20	6	52
NC-20-※※※		20	36	25	12.5	43.5	52	139	8	31.5	5	22	6	58
NC-25-※※※		25	44	30	15	52.5	63	168	10	38.5	7	28	8	68
NC-30-※※※		30	51	35	17.5	61	73	195	11.5	44	7	33	8	82

註：未標示的尺寸與ND-※※-00A相同


ND型無貯油設計，可使用防塵套（內充油脂），初期運轉時須定期給油，給油時在接頭部外圍塗布油脂，油脂以#90潤滑油較好。

SC

兩節式精密型萬向接頭


SC-※※-00A

附屬品：強力銷、固定銷各1支、扣環2個
追加工不可

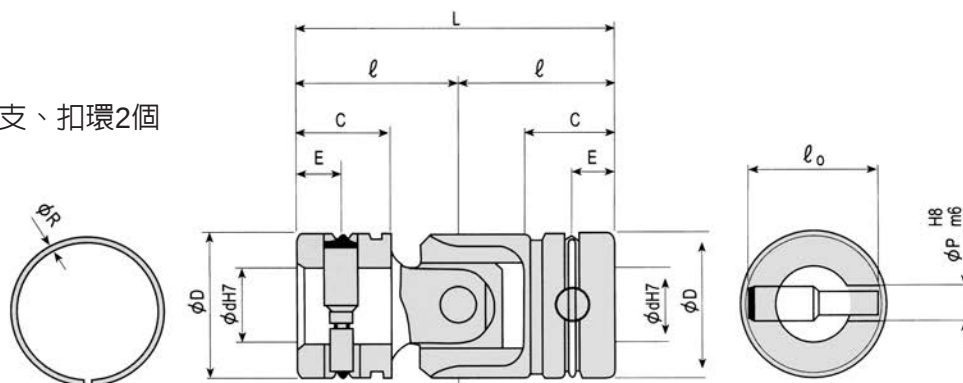


SC-※※-01A

附屬品：
強力銷1支、扣環2個
追加工不可

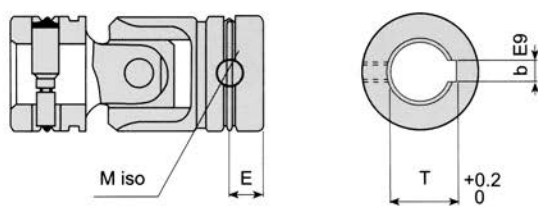

SC-※※-02A

附屬品：
扣環2個
追加工不可

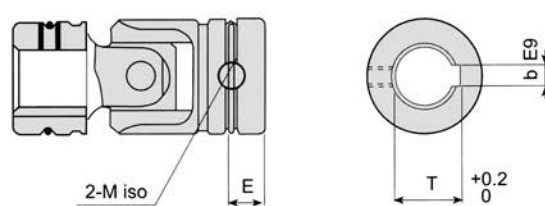

單位：mm

型號	尺寸	d	D	C	E	l	L	P	l ₀	b	T	M	G
SC-03-00A		3	6	9	2.5	13	26	1	5	—	—	—	—
SC-04-00A		4	8	7	4	12	24	1.5	6.8	—	—	—	—
SC-05-00A		5	10	9	5	15	30	2	8.7	—	—	—	—
SC-06-※※※		6	12	9	4.5	15.5	31	3	10	—	—	—	—
SC-08-※※※		8	15	10	5	18	36	3.5	12.5	3	9.5	—	25
SC-10-※※※		10	20	12	6	21	42	4.5	16.5	4	11.5	—	32
SC-12-※※※		12	23	15	7.5	26	52	5	20.5	4	13.5	5	35
SC-14-※※※		14	26	17	8.5	29.5	59	5.8	23	5	16	5	40
SC-16-※※※		16	30	22	11	37	74	6.5	26.5	5	18	6	46
SC-18-※※※		18	33	23.5	11.75	40.5	81	7	28.5	5	20	6	52
SC-20-※※※		20	36	25	12.5	43.5	87	8	31.5	5	22	6	58
SC-22-※※※		22	40	27	13.5	47	94	9	34.5	7	25	6	62
SC-25-※※※		25	44	30	15	52.5	105	10	38.5	7	28	8	68
SC-30-※※※		30	51	35	17.5	61	122	11.5	44	7	33	8	82
SC-35-※※※		35	59	40	20	70	140	13	52	10	38.5	10	90
SC-40-※※※		40	67	45	22.5	78.5	157	14.5	60	10	43.5	10	100
SC-45-※※※		45	75	50	25	88	176	16	68	12	48.5	10	110
SC-50-※※※		50	83	55	27.5	95.7	191.4	17.5	76	12	53.5	10	120
SC-60-88A		60	98	70	—	118	236	—	—	12	65	12	140


註：未標示的尺寸與SC-※※-00A相同

SD

三節式精密型萬向接頭


SD-※※-00A

附屬品：強力銷、固定銷各1支、扣環2個
追加工不可

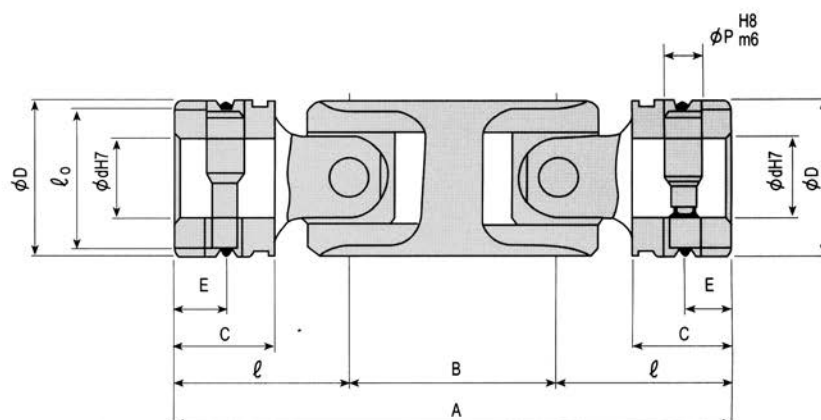


SD-※※-01A

附屬品：
強力銷1支、扣環2個
追加工不可

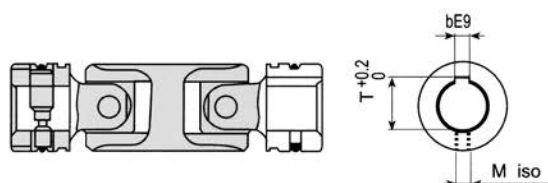


SD-※※-02A

附屬品：
扣環2個
追加工不可



SD-※※-※※C



若須附防塵套時請預先註明

ø35以上的規格為蛇復套防塵套內已裝有油脂

單位：mm

型號	尺寸	d	D	C	E	ℓ	B	A	P	ℓ_0	b	T	M	G	重量(g) Weight
SD-06-※※※		6	12	9	4.5	15.5	18.5	49.5	3	10	—	—	—	—	30
SD-08-※※※		8	15	10	5	18	22	58	3.5	12.5	3	9.5	3	26	50
SD-10-※※※		10	19	12	6	21	25.5	67.5	4.5	16.5	4	11.5	5	32	95
SD-12-※※※		12	23	15	7.5	26	31	83	5	20.5	4	13.5	5	36	180
SD-14-※※※		14	26	17	8.5	29.5	35.5	94.5	5.8	23	5	16	6	40	250
SD-16-※※※		16	30	22	11	37	43.5	117.5	6.5	26.5	5	18	6	46	410
SD-18-※※※		18	33	23.5	11.75	40.5	48	129	7	28.5	5	20	6	52	550
SD-20-※※※		20	36	25	12.5	43.5	52	139	8	31.5	5	22	6	58	690
SD-22-※※※		22	40	27	13.5	47	56	150	9	34.5	7	25	6	62	940
SD-25-※※※		25	44	30	15	52.5	63	168	10	38.5	7	28	8	68	1240
SD-30-※※※		30	51	35	17.5	61	73	195	11.5	44	7	33	8	82	1775
SD-35-※※※		35	59	40	20	70	84	224	13	52	10	38.5	10	90	3180
SD-40-※※※		40	67	45	22.5	78.5	94	251	14.5	60	10	43.5	10	100	4150
SD-45-※※※		45	75	50	25	88	106	282	16	68	12	48.5	10	110	6225
SD-50-※※※		50	83	55	27.5	95.7	113	304.4	17.5	76	12	53.5	10	120	7750

中間軸為栓槽軸，變位時滑動較容易。


利用F空間，在固定的裝配間距內，拆卸容易。

標準品使用SC型萬向接頭。

類似下列情況，請預先洽詢並附略圖訂。

- 伸縮量大時。
- 高速迴轉等待特別要求精度時。
- 使用SC型以外的接頭時。
- 多個的栓槽軸間須具互換性時。

標準品 SP-※※-00A

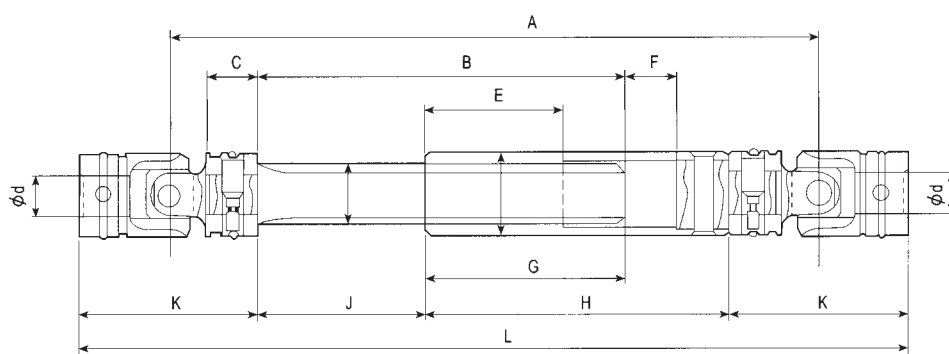

- 栓槽軸與套筒聯接時請將兩端↔對正再接合
- 通常使用時是將套筒端與驅動端聯接。

單位：mm


型號	尺寸	d	A	B	C	D	栓槽軸齒型	E	F	G	H	J	K	L	伸縮	X	Y
SP-08-00A	8	127	65	10	17		漸開線齒型 大徑10m=0.75z=11	20	11	39	65	26	36	163	$\pm \frac{19}{11}$	100	—
SP-10-00A	10	135	65	12	17		漸開線齒型 大徑10m=0.75z=11	20	13	37	65	28	42	177	$\pm \frac{17}{13}$	100	—
SP-12-00A	12	173	88	15	23		16x13x3.5-6	40	16	56	89	32	52	225	$\pm \frac{16}{16}$	195	285
SP-14-00A	14	181	87	17	23		16x13x3.5-6	40	18	54	89	33	59	240	$\pm \frac{14}{18}$	195	285
SP-16-00A	16	234	115	22	30		20x16x4-6	40	23	75	120	40	74	308	$\pm \frac{35}{23}$	110	230
SP-18-00A	18	246	115	23.5	30		20x16x4-6	40	26.5	70	120	45	81	327	$\pm \frac{30}{26.5}$	110	230
SP-20-00A	20	257	118	25	36		22x18x5-6	40	27	73	125	45	87	344	$\pm \frac{33}{27}$	115	260
SP-22-00A	22	266	115	27	40		25x21x5-6	40	30	68	125	47	94	360	$\pm \frac{28}{30}$	105	270
SP-25-00A	25	300	133	30	44		28x23x6-6	45	32	83	145	50	105	405	$\pm \frac{32}{32}$	235	410
SP-30-00A	30	342	145	35	51		32x26x6-6	50	40	85	160	60	122	464	$\pm \frac{35}{40}$	170	375
SP-35-00A	35	375	150	40	59		38x32x8-6	50	45	85	170	65	140	515	$\pm \frac{35}{45}$	160	395
SP-40-00A	40	417	165	45	67		42x36x8-6	60	50	95	190	70	157	574	$\pm \frac{35}{50}$	140	410
SP-45-00A	45	461	180	50	75		45x41x8-8	70	55	105	210	75	176	637	$\pm \frac{35}{55}$	120	420
SP-50-00A	50	505.6	199.2	55	83		52x46x9-8	80	60	115	230	84.2	191.4	697	$\pm \frac{35}{60}$	95	430

(註)伸縮欄的(一)尺寸為拆卸的空間F


標準品的型號

附防塵套的名稱SP-※※-※※C


SP-※※-00A




SP-※※-01A



SP-※※-02A



SP-※※-08A
ø8的尺寸無鍵槽



SP-※※-88A
ø8的尺寸無鍵槽




標準品以外的規格

準備詢價時請附略圖

1. 想取較標準品短時


- 請以全長L
 - a. 拆卸用空間F不要而取消。
 - b. 切短B、G、H、J的尺寸。
 - c. 將套筒與傳動軛熔接。



2. 想取較標準品長時

- 請以全長L
 - a. $\leq L + X$ 時
栓槽軸的加長
 - b. $L + X$ 至 $L + Y$ 時
以連結銷加長
 - c. $\leq L + Y$ 時
以空心管加長

3. 左右的萬向接頭規格變更時 以栓槽軸側做變更為較小規格。



4. 欲使用標準規格以外的SC型時 變更兩端的傳動軛。

