


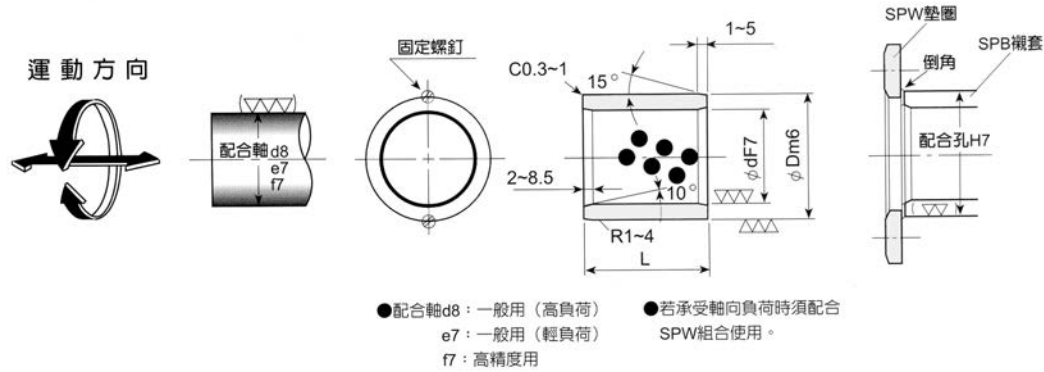

軸徑 區分	尺 寸 (mm)		長 度 L 公差 -0.1										
	內徑		外徑		8	10	12	15	16	20	25	30	35
	ød 公差	øD 公差	SPB	SPB	SPB	SPB	SPB	SPB	SPB	SPB	SPB	SPB	SPB
8	8 +0.028 +0.013	12 +0.018 +0.007	-081208	-081210	-081212	-081215							
10	10 "	14 "	-101408	-101410	-101412	-101415			-101420				
12	12 +0.034 +0.016	18 "		-121810	-121812	-121815	-121816	-121820	-121825	-121830			
13	13 "	19 +0.021 +0.008		-131910	-131912	-131915		-131920					
14	14 "	20 "		-142010	-142012	-142015		-142020	-142025	-142030			
15	15 "	21 "		-152110	-152112	-152115	-152116	-152120	-152125	-152130			
16	16 "	22 "		-162210	-162212	-162215	-162216	-162220	-162225	-162230	-162235		
18	18 "	24 "			-182412	-182415	-182416	-182420	-182425	-182430			
20	20 +0.041 +0.020	28 "		-202810	-202812	-202815	-202816	-202820	-202825	-202830	-202835		
	20 "	30 "					-203016	-203020	-203025	-203030	-203035		
25	25 "	33 +0.025 +0.009			-253312	-253315	-253316	-253320	-253325	-253330	-253335		
	25 "	35 "			-253512	-253515	-253516	-253520	-253525	-253530	-253535		
30	30 "	38 "			-303812	-303815		-303820	-303825	-303830	-303835		
	30 "	40 "			-304012	-304015		-304020	-304025	-304030	-304035		
31.5	31.5 +0.050 +0.025	40 "								-314030			
35	35 "	44 "							-354425	-354430	-354435		
	35 "	45 "						-354520	-354525	-354530	-354535		
40	40 "	50 "						-405020	-405025	-405030	-405035		
	40 "	55 +0.030 +0.011								-405530	-405535		
45	45 "	55 "								-455530	-455535		
	45 "	56 "								-455630	-455635		
	45 "	60 "								-456030	-456035		
50	50 "	60 "								-506030	-506035		
	50 "	62 "								-506230	-506235		
	50 "	65 "								-506530			
55	55 +0.060 +0.030	70 "								-557030	-557035		
60	60 "	74 "								-607430	-607435		
	60 "	75 "								-607530	-607535		
63	63 "	75 "											
65	65 "	80 "											
70	70 "	85 +0.035 +0.013								-708530	-708535		
	70 "	90 "											
75	75 "	90 "											
	75 "	95 "											
80	80 "	96 "											
	80 "	100 "											
90	90 +0.071 +0.036	110 "											
100	100 "	120 "											
110	110 "	130 +0.040 +0.015											
120	120 "	140 "											
125	125 +0.083 +0.043	145 "											
130	130 "	150 "											
140	140 "	160 "											
150	150 "	170 "											
160	160 "	180 "											

使用注意事項


- ※自潤#500SP襯套(SPB)在迴轉，搖擺及往復運動均可使用。
- ※若承受軸向荷重時，請配合自潤#500SP墊圈(SPW)組合使用。
- ※請避免在水中使用。

※特殊規格尺寸及使用場所亦可訂製。


型號標示

SPB-○○○○
內徑 外徑 長度

長 度 L 公差 $\begin{smallmatrix} -0.1 \\ +0.3 \end{smallmatrix}$										內 徑	外 徑	適用 墊圈 SPW
40	50	60	70	80	100	120	130	140	150			
SPB	SPB	SPB	SPB	SPB	SPB	SPB	SPB	SPB	SPB			
										8	12	—
										10	14	-1003
										12	18	-1203
										13	19	-1303
										14	20	-1403
										15	21	-1503
-162240										16	22	-1603
										18	24	-1803
-202840	-202850									20	28	-2005
-203040										20	30	"
-253340	-253350	-253360								25	33	-2505
-253540	-253550									25	35	"
-303840	-303850	-303860								30	38	-3005
-304040	-304050	-304060								30	40	"
-314040										31.5	40	—
-354440	-354450	-354460								35	44	-3505
-354540	-354550	-354560								35	45	"
-405040	-405050	-405060	-405070	-405080						40	50	-4007
-405540	-405550	-405560								40	55	"
-455540	-455550	-455560								45	55	-4507
-455640	-455650	-455660								45	56	"
-456040	-456050	-456060	-456070	-456080						45	60	"
-506040	-506050	-506060	-506070	-506080						50	60	-5008
-506240	-506250	-506260	-506270							50	62	"
-506540	-506550	-506560	-506570	-506580	-5065100					50	65	"
-557040	-557050	-557060	-557070							55	70	-5508
-607440	-607450	-607460	-607470	-607480						60	74	-6008
-607540	-607550	-607560	-607570	-607580	-6075100					60	75	"
		-637560	-637570	-637580						63	75	—
-658040	-658050	-658060	-658070	-658080						65	80	-6508
-708540	-708550	-708560	-708570	-708580	-7085100					70	85	-7010
	-709050	-709060	-709070	-709080						70	90	"
	-759050	-759060	-759070	-759080	-7590100					75	90	-7510
		-759560	-759570	-759580	-7595100					75	95	"
-809640	-809650	-809660	-809670	-809680	-8096100	-8096120				80	96	-8010
-8010040	-8010050	-8010060	-8010070	-8010080	-80100100	-80100120		-80100140		80	100	"
	-9011050	-9011060		-9011080	-90110100	-90110120				90	110	-9010
	-10012050	-10012060	-10012070	-10012080	-100120100	-100120120		-100120140		100	120	-10010
	-11013050		-11013070	-11013080	-110130100	-110130120				110	130	—
			-12014070	-12014080	-120140100	-120140120		-120140140		120	140	-12010
					-125145100	-125145120				125	145	—
				-13015080	-130150100		-130150130			130	150	—
					-140160100			-140160140		140	160	—
					-15017080	-150170100			-150170150	150	170	—
					-16018080	-160180100			-160180150	160	180	—

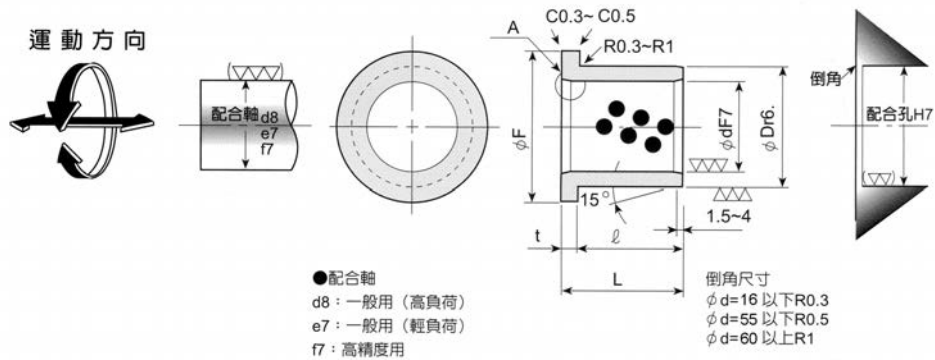

軸徑 區分	尺 寸 (mm)							長 度 L							公差	
	內 徑		外 徑		凸 緣			10	15	20	25	30	35			
	ød	公差	øD	公差	ø F	厚度	公差	SPF	SPF	SPF	SPF	SPF	SPF			
10	10	+0.040 +0.025	14	+0.034 +0.023	22	2	0 -0.1	-1010	-1015	-1020						
12	12	+0.050 +0.032	18	"	25	3	"	-1210	-1215	-1220	-1225	-1230				
13	13	"	19	+0.041 +0.028	26	"	"		-1315	-1320						
14	14	"	20	"	27	"	"		-1415	-1420	-1425					
15	15	"	21	"	28	"	"	-1510	-1515	-1520	-1525	-1530				
16	16	"	22	"	29	"	"		-1615	-1620	-1625	-1630	-1635			
20	20	+0.061 +0.040	30	"	40	5	"		-2015	-2020	-2025	-2030				
25	25	"	35	+0.050 +0.034	45	"	"		-2515	-2520	-2525	-2530	-2535			
30	30	"	40	"	50	"	"			-3020	-3025	-3030	-3035			
31.5	31.5	+0.075 +0.050	40	"	"	"	"			-3120		-3130	-3135			
35	35	"	45	"	60	"	"			-3520	-3525	-3530	-3535			
40	40	"	50	"	65	"	"			-4020	-4025	-4030	-4035			
45	45	"	55	+0.060 +0.041	70	"	"					-4530	-4535			
50	50	"	60	"	75	"	"					-5030	-5035			
55	55	+0.090 +0.060	65	"	80	"	"									
60	60	"	75	+0.062 +0.043	90	7.5	"									
63	63	"	75	"	85	"	"									
65	65	"	80	+0.062 +0.043	95	7.5	"									
70	70	"	85	+0.073 +0.051	105	"	"									
75	75	"	90	"	110	"	"									
80	80	"	100	"	120	10	"									
90	90	+0.107 +0.072	110	+0.076 +0.054	130	"	"									
100	100	"	120	"	150	"	"									
120	120	"	140	+0.088 +0.063	170	"	"									



型號標示
SPF-
內徑 長度

使用注意事項

- ※自潤#500SP襯套(SPF)在迴轉，搖擺及往復運動均可使用。
- ※請注意凸緣部無固體潤滑劑。
- ※請避免在水中使用。

※特殊規格尺寸亦可訂製。

長 度 L 公差 ± 0.1						內 徑	外 徑
40	50	60	67.5	80	100		
SPF	SPF	SPF	SPF	SPF	SPF		
						10	14
						12	18
						13	19
						14	20
						15	21
-1640						16	22
-2040						20	30
-2540	-2550					25	35
-3040	-3050					30	40
-3140	-					31.5	40
-3540	-3550					35	45
-4040	-4050					40	50
-4540	-4550	-4560				45	55
-5040	-5050	-5060				50	60
-5540		-5560				55	65
-6040	-6050	-6060		-6080		60	75
			-6367			63	75
		-6560				65	80
	-7050			-7080		70	85
		-7560				75	90
		-8060		-8080	-80100	80	100
		-9060		-9080		90	110
				-10080	-100100	100	120
				-12080	-120100	120	140