




SSG-Progressive Grease Lubrication Systems

SSG-D1(Grease Cup)

Series	SSG
Type	D1
Distributor	DU-series
Voltage (single phase)	24V DC
Consumption Power(W)	93
Output Power (W)	45
Current Consumption(A)	4.0 Max
Output Bore	Ø6
Discharging Pressure In MPa (kgf/cm ²)	Maximum15(150)
Discharging Capacity (cc/mlm)	Above 20
Float Switch	x(Optional)
Pressure Switch	x
Pressure Gauge	ø(MPa & kgf/cm ²)
Cup Capacity (c.c.)	1000
Accepted Grease	No. 000, No.00, No.0

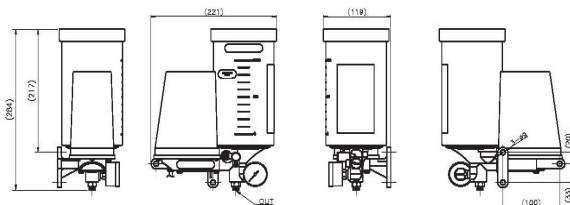

SSG-D1(Grease Cartridge)

Series	SSG
Type	D1
Distributor	DU-series
Voltage (single phase)	24V DC
Consumption Power(W)	93
Output Power (W)	45
Current Consumption(A)	4.0 Max
Output Bore	Ø6
Discharging Pressure In MPa (kgf/cm ²)	Maximum15(150)
Discharging Capacity (cc/mlm)	Above 20
Float Switch	x(Optional)
Pressure Switch	x
Pressure Gauge	ø(MPa & kgf/cm ²)
Cup Capacity (c.c.)	700
Accepted Grease	No. 000, No.00, No.0

