

Pinnacle

Since 1976



CE EMC

Milling Machines

Excellence in Quality



PK-Q2S

- Step Pulley Head (Gear Type).
- NT40# spindle taper.
- Extra wide table working area 1270×260MM.
- 5HP powerful motor.
- Hardened and ground X,Y axes and table surface.
- Square slideways on column and knee.

■ Specifications:

MODEL		PK-Q2S	
Table		1270 × 260 mm	
T-Slot (width x number x distance)		16 × 3 × 63.5	
Rapid Feed Rate		890 mm/min	
TRAVEL			
Longitudinal		750	
Cross		380	
Vertical		380	
Spindle Travel		140	
SPINDLE			
Taper		NT40	
Spindle Nose to Table Surface		0~483 mm	
Spindle Center to Column		180~515 mm	
Spindle Speed	Low Range -	Low: 75, 110, 170, 250	High: 145, 200, 340, 480
	High Range -	Low: 550, 800, 1220, 1800	High: 1100, 1600, 2450, 3600
Quill Feeds Per Rev. of Spindle		0.035-0.07-0.14 mm	
Spindle Motor		3.7 kw (5 HP)	
Swivel Angle to Right & Left		90°	
Power		3PH / 220V / 15AMP	
Approximate Net Weight		1600 kg	

● All specifications and designs are subject to change without notice.



Q2S Step Pulley Head (Gear Type)



Q2S Inverter Head (OPT.)



■ STANDARD:

- Drawbar
- Way Chip Protectors
- Tool Box with Tools
- Electric Box
- Power Feed for X Axis
- Power Feed for Y Axis
- Rapid Motor for Knee Elevation
- Halogen Worklight
- Cooling Pump System
- Chip Tray
- Halogen Worklight




■ Machine Overall Dimensions

PK-Q2S

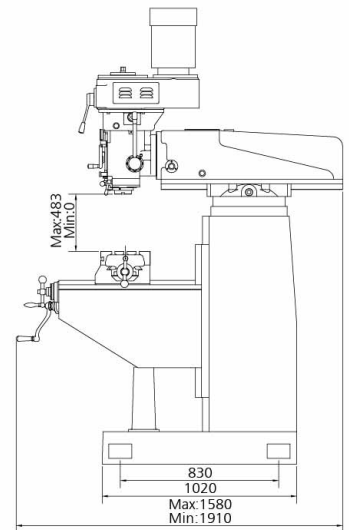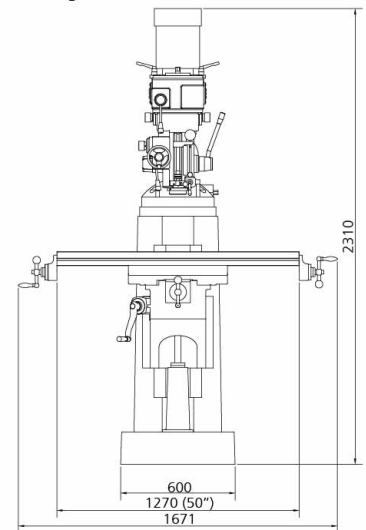

■ T-Slots

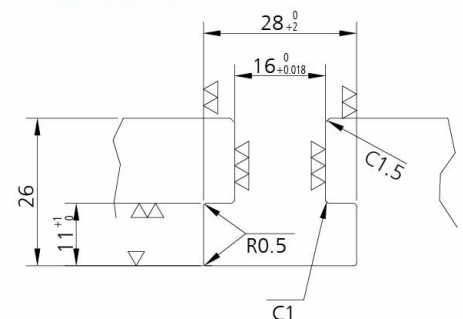

Pinnacle Machine Tool Co., Ltd.

No. 149, Sec. 1, Goufeng Rd., Shengang Dist.,
Taichung City 429002, Taiwan
TEL: 886-4-25252995
FAX: 886-4-25252991
E-mail: info@pinnacle-mc.com
http://www.pinnacle-mc.com

