


SUPER POWERFUL DEMAGNETIZER

HD-500AD



- Desktop type. Pass workpieces through operation area to demagnetize.
- Suitable for large workpieces, molds/dies, and thick steel plates.
- Auto workpiece detector for power saving.
- Demag. Range 400mm.
- Demag. Height 100~110mm.

Model	HD-500AD
Input Voltage	AC 220V 10.5A / 380V 6.2A 3Ø
Duty Cycle	Continuous use
Weight	71.5kg

SUPER POWERFUL DEMAGNETIZER WITH CONVEYOR

HD-500CV



- Conveyor for manual demagnetization
- Suitable for large workpieces, molds/dies, and steel products.
- Auto workpiece detector for power saving.
- Demag. Height 100~110mm.

Model	HD-500CV
Input Voltage	AC 220V 10.5A / 380V 6.2A 3Ø
Duty Cycle	Continuous use

SUPER POWERFUL DEMAGNETIZER WITH POWER CONVEYOR BELT

HD-500BV



- Power Conveyor for auto demagnetization.
- Suitable for large workpieces, molds/dies, and steel products.
- Demag. Height 100~110mm.

Model	HD-500BV
Input Voltage	AC 220V 10.5A / 380V 6.2A 3Ø
Duty Cycle	Continuous use

PLATE-TYPE SUPER POWERFUL DEMAGNETIZER

HD-620AD+Stand




- Demagnetizer with stand for easy operation.
- Suitable for large workpieces, molds/dies, and thick steel plates.
- Auto workpiece detector for power saving.
- Demag. Range 400mm.
- Demag. Height 70~80mm.

Model	HD-620AD with Stand
Input Voltage	AC 220V 11A / 380V 6.5A 3Ø
Duty Cycle	Continuous use
Weight	97.5kg

PLATE-TYPE SUPER POWERFUL DEMAGNETIZER

HD-620AD

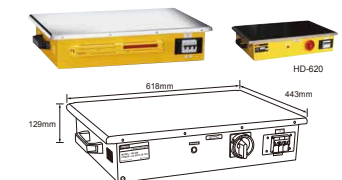

- Desktop type. Pass workpieces through operation area to demagnetize.
- Suitable for large workpieces, molds/dies, and thick steel plates.
- Auto workpiece detector for power saving.
- Demag. Range 400mm.
- Demag. Height 70~80mm.

Model	HD-620AD
Input Voltage	AC 220V 11A / 380V 6.5A 3Ø
Duty Cycle	Continuous use
Weight	69.5kg

SUPER POWERFUL DEMAGNETIZER

HD-420AD




- Desktop type. Pass workpieces through operation area to demagnetize.
- Suitable for large workpieces, molds/dies, and thick steel plates.
- Auto workpiece detector for power saving.
- Demag. Range 400mm.
- Demag. Height 60~70mm.

Model	HD-420AD
Input Voltage	AC 220V 5.6A / 380V 3.2A 3Ø
Duty Cycle	Continuous use
Weight	47kg

POWERFUL DEMAGNETIZER

HD-380

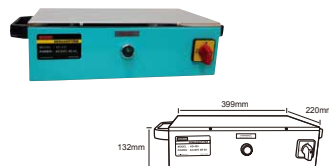


- Desktop type. Pass workpieces through operation area to demagnetize.
- Suitable for middle-sized parts, accessories, and steel plates.
- Demag. Range 160mm.

Model	HD-380
Input Voltage	AC 110V 12.8A / 220V 6.4A
Duty Cycle	Continuous use
Weight	29.4kg

POWERFUL DEMAGNETIZER

HD-280

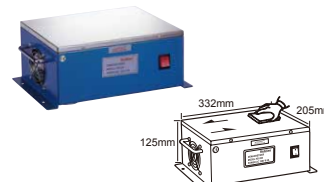

- Desktop type. Pass workpieces through operation area to demagnetize.
- Suitable for middle-sized parts, accessories, and steel plates.
- Demag. Range 160mm.

Model	HD-280
Input Voltage	AC 110V 6.4A / 220V 3.2A
Duty Cycle	Continuous use
Weight	15kg

WHEEL-TYPE DEMAGNETIZER

HD-270



- Suitable for large steel plates.
- Demagnetization field generated beneath the machine.
- Easy to move on the steel plate by hand grip and wheels.
- Demag. Height 40~50 mm.

Model	HD-270
Input Voltage	AC 110V 4.4A / 220V 2.2A
Duty Cycle	Continuous use
Weight	11kg

RAMP-TYPE DEMAGNETIZER

HDS-230



- Suitable for batches of small-size workpieces.
- Slope tunnel design. Easy dump and easy collection.

Model	HDS-230
Input Voltage	AC 110V 12A / 220V 6A 400W
Duty Cycle	Continuous use
Weight	26.5kg

TUNNEL DEMAGNETIZER

HD-2545(32A, 20A)



HD-2545(32A, 20A)
790 x 640 x 200 mm

- Pass workpieces through the tunnel to demagnetize.
- Suitable for demagnetizing many parts for mass production.
- Demagnetizing field uniformly generated in the tunnel.

Model	HD-2545(32A, 20A)
Input Voltage	AC 220V 32A / 380V 20A
Gate	250x450
Duty cycle	Continuous use
Weight	71kg / 80kg

TUNNEL DEMAGNETIZER

HD-1015(6A, 4A)

HD-1525(12A, 7A)



HD-1015(6A, 4A)
490 x 450 x 200 mm




HD-1525(12A, 7A)
590 x 510 x 200 mm

- Pass workpieces through the tunnel to demagnetize.
- Suitable for demagnetizing many parts for mass production.
- Demagnetizing field uniformly generated in the tunnel.

Model	HD-1015	HD-1525
Input Voltage	AC 220V 6A / 380V 4A	AC 220V 12A / 380V 7A
Gate	100x150	150x250
Duty cycle	Continuous use	Continuous use
Weight	30kg	42kg / 47.6kg

PIN POINT DEMAGNETIZER

HDP-220

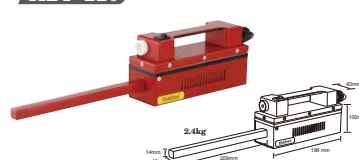


- Handheld demagnetizer
- Suitable for demagnetizing inside the molds or dies.
- Front-end stick-shape design for reaching the corner.
- Demag. range 25mm-radius circle from the tip.

Model	HDP-220
Input Voltage	AC 110V 2.4A / 220V 1.2A
Duty Cycle	Pausing for 4 mins after operation for 1 min.
Weight	2.4kg

BAT-TYPE DEMAGNETIZER

HDB-210

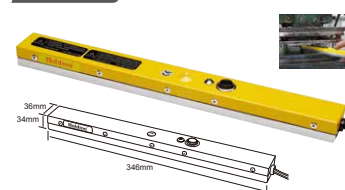

- Handheld demagnetizer
- Suitable for demagnetizing inside the molds or dies.
- Rod-shape design for reaching the corner.

Model	HDB-210
Input Voltage	AC 110V 1.1A / 220V 0.5A
Duty Cycle	Pausing for 4 mins after operation for 1 min.
Weight	1.1kg

MAGNETIC CHUCK CONTROLLER & DEMAGNETIZER

HD-510A(10A, 15A, 20A)




HD-510-10A
150 x 330 x 260 mm 15 kg
HD-510-15A
150 x 330 x 260 mm 20 kg
HD-510-20A
180 x 385 x 295 mm 32 kg

- For powerful magnetic chuck.
- The magnetic force can be adjusted.
- LED display for Voltage and current.
- Current capacity 10A, 15A, 20A.
- Demag. time 6~15 seconds.
- Compatible with various magnetic chunk of different brand.

Model	HD-510A (10A, 15A, 20A)
Input Voltage	10A AC 110V / 220V (Single phase)
Duty Cycle	15A AC 220V or 380V
Weight	20A AC 220V or 380V

STANDARD DEMAGNETIZER

HD-200

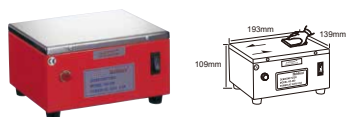


- Desktop type. Pass workpieces through operation area to demagnetize.
- Suitable for small parts, accessories, and tools.
- Demag. Range 110mm.

Model	HD-200
Input Voltage	AC 110V 2.4A / 220V 1.2A
Duty Cycle	Continuous use
Weight	7kg

PLATE-TYPE DEMAGNETIZER

HD-180

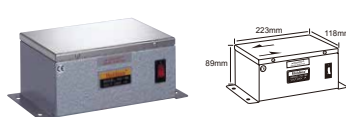

- Desktop type. Pass workpieces through operation area to demagnetize.
- Suitable for small parts, accessories, and tools.
- Demag. Range 80mm.

Model	HD-180
Input Voltage	AC 110V 2.6A / 220V 1.3A
Duty Cycle	Pausing for 20 mins after operation for 20 min.
Weight	4kg

CIRCULAR-TYPE DEMAGNETIZER

HDO-40




- Handheld demagnetizers
- Suitable for Suitable for Stick-type tool - Drills, Cutters, or Nuzzles.

Model	HDO-40
Input Voltage	AC 110V 0.85A / 220V 0.3A
Duty Cycle	Pausing for 4 mins after operation for 1 min.
Weight	0.85kg

HANDY-TYPE DEMAGNETIZER

HD-123

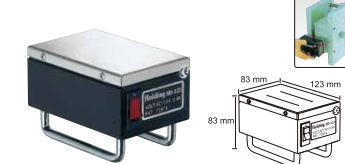

- Handheld demagnetizers
- Suitable for demagnetizing the surface of molds, steel plate, and tools.
- Demag. range 60mm.

Model	HD-123
Input Voltage	AC 110V 0.9A / 220V 0.3A
Duty Cycle	Pausing for 10 mins after operation for 20 min.
Weight	1.65kg

MAGNETIC CHUCK CONTROLLER & DEMAGNETIZER

WL-115C



- For standard magnetic chuck.
- The magnetic force can be adjusted.
- LED display for Voltage and current.
- Current capacity 10A, 15A, 20A.
- Demag. time 6~15 seconds.
- Compatible with various magnetic chunk of different brand.

Model	WL-115C
Input Voltage	AC 110V / 220V 5A (Single phase)

SINCE 1983

HOLDING ELECTRIC CO., LTD.

NO.31, CHAOGUEI RD., TAICHUNG 40755, TAIWAN

TEL: +886-4-22511479, 22541893

FAX: +886-4-22553626

E-mail: hd@holding.com.tw

Patented products. Counterfeiting not allowed.

* All series products are CE & RoHS certified.



www.holding.com.tw