

## Standard Filtration

Single Filtration Procedure for the thick chips OR the thin chips

Model	CC-SF
Dimension	57cmX38cmX116cm
Capacity	6.5 L
Weight	70 KGS
Max Flow	180 Liter/per min (47.49Gallon/per min)
Pressure	0.5Bar(7.25Psi)~8.3Bar(120Psi)
Filtration Accuracy	380um
Filter Material	Stainless 304 or Filter Bag



**RH RHPT**  
**AiCLOS**  
*Chip Cleaner*

## High Precision Filtration

Modular design.

Dual filtration for the thick chips AND the thin chips able to be collected at the same time.

Model	CC-HPF
Dimension	97cmX38cmX118cm
Capacity	6.5 L + 2 L
Weight	85 KGS
Max Flow	180 Liter/per min (47.49Gallon/per min)
Pressure	0.5Bar(7.25Psi)~8.3Bar(120Psi)
Filtration Accuracy	Customized
Filter Material	Stainless 304 or Filter Bag



**RH RI HSIUNG**  
**PRECISION TECH.CO.LTD**

TEL:07-3505656 FAX:07-3503198

No.33,Chongzheng Rd., Zuoying Dist.  
Kaohsiung City 81365, Taiwan

Email : rhctools@gmail.com



[www.rhptec.com](http://www.rhptec.com)

# AiCLOS Chip Cleaner

## Suitable for multiple Machinery

CNC Lathe




CNC Milling Machine



Grinding Machine



Electrical Discharge Machine

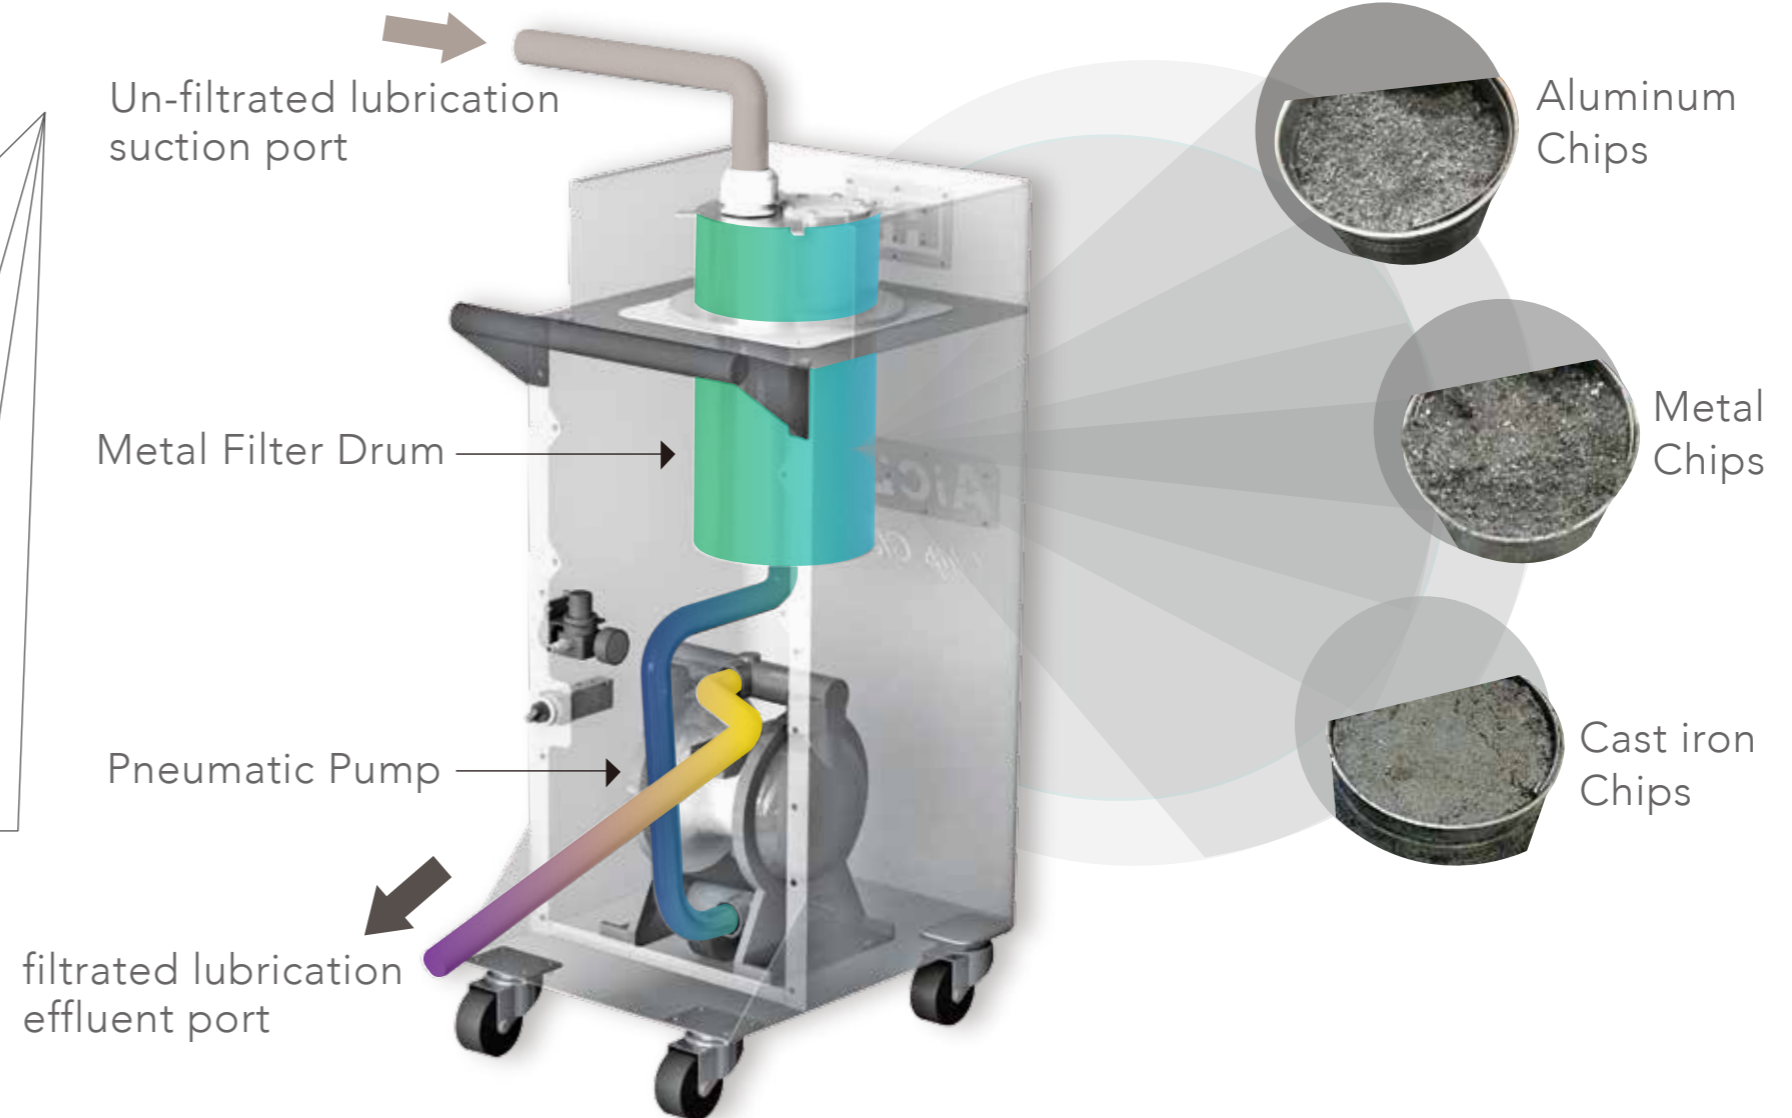

## Advantage & Optimization

- Pneumatically operated, electricity free. Avoid the potential damage caused by the pump idling.
- High efficiency, not necessary to shut down the machine tool.
- Portable with wheel.
  - Adjustable by customer's precision demand.
  - Extend the lubrication life cycle, decrease the odor and the germ growth.
  - Solve the chip & sludge desposition problem completely.

## Service & Warranty

- Assembled only by the best components.
- Comprehensive after-sales service.
- High quality.
- Customized available.

