
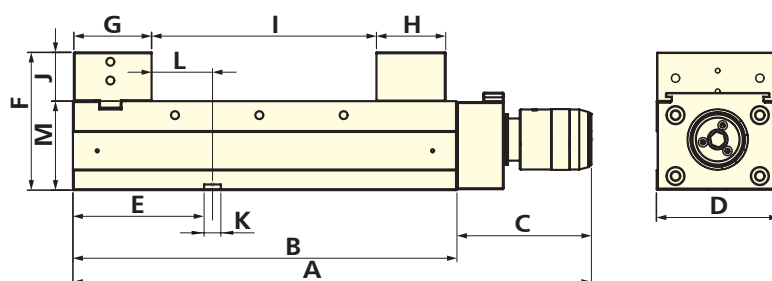


定壓式精密倍力虎鉗

MC PRESSURE CONSTANT POWER VISE

EPVS

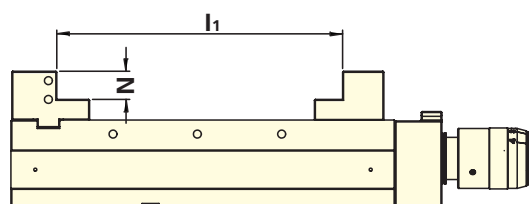

MODEL	A	B	C	D	E	F	G	H	I	I1	J	K	L	M	N
EPV-130VS	564	410	144	131	149	147	83	74	235	300	52	18	65	95	30
EPV-160VS	601	477	124	161	152	160	86	86	300	370	55	18	65	105	30
EPV-160VLS	805	681	124	161	152	160	86	86	500	570	55	18	65	105	30
EPV-200VS	676	552	124	201	194	170	100	97	350	426	60	18	93	110	30
EPV-200VLS	830	706	124	201	194	170	100	97	500	576	60	18	93	110	30

產品特性:

- 虎鉗材質使用球狀石墨鑄鐵FCD60 (等同於GGG60)，60 kgs/mm²或80,000 psi高抗張拉力，不易變形。
- 滑軌經高週波熱處理HRC 45°，可維持精度及延長耐磨。
- 同高定寸規格可搭配多台並列使用，適用於各式加工機作重切削及精密加工。
- 鉗口依加工需求自行替換。
- 四段定壓夾持裝置。

FEATURES:

- Rigid material-vise body of ductile iron FCD60JIS (equal to GGG60) with 60 kgs/mm² or 80,000 psi tensile strength.
- The slide ways are heat treated to HRC 45° and that can provide the high accuracy and long service life.
- Fixed Height, EPV vises can be used 2 or more together.
- EPV vise is suitable for CNC Vertical & Horizontal Machine Center.
- Exchangeable jaws: quick & easy replacement.
- 4-Step Pressure Constant device.