



Machinery

T +886-4-2533-7614 E info@chiah-chyun.com

WTS

Double Spindle
Double Turrets
E-Axis

Double Y-Axis, 32 Live Tools
Sub Spindle E-Axis Shifting Function
Fixed Tailstock

- An E-axis allows for the second spindle and tailstock to move up and down. This provides an independent working environment for machining.
- The WTS comes with two BMT55 16-Station power turrets that can also be equipped with different types of BMT55 systems. The upper and lower turrets can work independently with spindles 1 and 2.
- The special structural design of the WTS uses a rigid 90° angle for the turret carriage, providing excellent chip flushing and removal.
- A fixed tailstock for long workpieces keeps them parallel, and improves precision and stability during machining.



CE




Machinery

Advanced Machining Solutions

Competence and Capabilities

Machine Layout

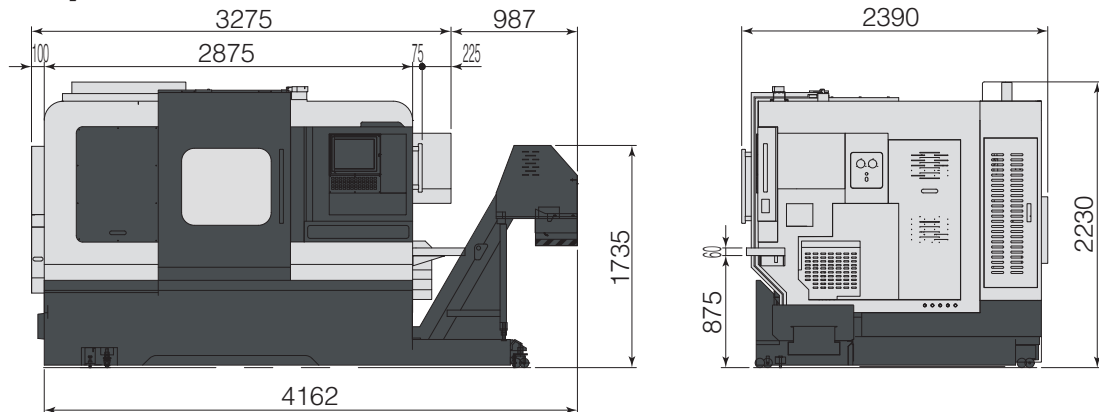

Unit: mm

Specifications

Model		WTS-52Y2M		WTS-65Y2M	
Control Unit	Controller	MITSUBISHI	FANUC	MITSUBISHI	FANUC
Capacity	Max. Turning Dia.	Ø320 mm			
	Standard Turning Dia.	Ø210 mm			
	Max. Turning Length	500 mm			
Axes Specification	X1/X2-Axis Travel	215/230 mm			
	Z1/Z2-Axis Travel	500/500 mm			
	Y1/Y2-Axis Travel	± 50 mm / ± 50 mm			
	X/Z/Y-Axis Motor	2.2 kW	2.7 kW	2.2 kW	2.7 kW
	X/Z/Y-Axis Rapid Travel Speed	16/6/40 m/min			
	B-Axis Travel	500 mm		500 mm	
	B-Axis Rapid Travel Speed	40 m/min			
	E-Axis Travel	170 mm			
	E-Axis Motor	2.2 kW	2.7 kW	2.2 kW	2.7 kW
	E-Axis Rapid Travel Speed	6 m/min			
Spindle	Min. Input Unit	0.001 mm			
	Max. Bar Feeding Dia.	Ø51 mm		Ø65 mm	
	Spindle Motor	7.5/11 kW	13/15 kW	7.5/11 kW	18/22 kW
	Max. Spindle Speed	6000 rpm		4000 rpm	
	Spindle Nose	A2-5		A2-6	
	C-Axis Index Positioning	0.001°			
Sub Spindle	Chuck Size	6"		8"	
	Max. Bar Feeding Dia.	Ø51 mm		Ø65 mm	
	Sub Spindle Motor	7.5/11 kW	13/15 kW	7.5/11 kW	18/22 kW
	Max. Sub Spindle Speed	6000 rpm		4000 rpm	
	Sub Spindle Nose	A2-5		A2-6	
	C-Axis Index Positioning	0.001°			
L, R, C	Chuck Size	6"		8"	
	Min. Moving Unit	0.001 mm			
	C-Axis Rapid Travel Rate	600 min ⁻¹			
	O.D. Turning Size	□20 mm			
Live Tooling Turret	I.D. Turning Size	Ø25 mm			
	Rotating Mode	Single Tool Transmission			
	Live Tooling Motor	3.7/5.5 kW	4.7 kW	3.7/5.5 kW	4.7 kW
	Live Tooling rpm	60~6000 min ⁻¹			
	Collet Size	ER Ø25			
	Tool Holder & Tool Size	BMT55			
Tail Stock	Quill Travel	500 mm		-	-
	Quill Tapper	MT04		-	-
Hydraulic	Hydraulic Motor	3 HP/2.2 kW x 2			
Coolant Pump	Spindle Coolant Pump	1.57 HP/1.17 kW/60 HZ			
	Turret Coolant Motor	1.57 HP/1.17 kW/60 HZ			
	Chip Flush Pump	1.57 HP/1.17 kW/60 HZ			
	Sub-Spindle Internal Coolant Pump	1.57 HP/1.17 kW/60 HZ			
Tank Capacity	Hydraulic Tank	65 L			
	Coolant Tank	440 L			
Machine	Power	220 V/81 KVA	220 V/91 KVA	220 V/81 KVA	220 V/96 KVA
	Machine Size (LxWxH) (includes chip conveyor)	4262 mm x 2390 mm x 2230 mm			
	Machine N.W. (includes chip conveyor)	10500kg			

* Design and specs subject to change without notice.



Machinery
CHIAH CHYUN MACHINERY CO., LTD.

TEL: +886-4-2533-7614
FAX: +886-4-2532-9524
<http://www.chiah-chyun.com>
mail: info@chiah-chyun.com

