

外置式手輪

Handy Manual Pulse Generator




SCAN&GO

特色

FEATURES

- 通過CE/IP67，手持單元種類多樣：單軸、多軸、數位顯示、無線連接...等供客戶選擇。
- 可擴充模組化設計：功能按鍵、選擇開關、捲線長1.5/3/5公尺、電源指示燈、工作燈、緊急停止開關、始能開關。
- 外置式手輪附有專用掛架及永久磁鐵，可固定或者磁吸於設備外罩上。
- 選擇開關支援多種編碼方式：點對點、二進制、格雷碼。
- 支援控制器：FANUC、SIEMENS、MITSUBISHI、FAGOR、FX5U、BECKHOFF、DELTA、Raspberry Pi...等。
- 提供ODM服務：依照客戶需求設計專用的外置式電子手輪。
- CE/IP67
- Extensible modular design: function button, selector switch, coding type, cable length (1.5/3/5 m), indicator light, work light, emergency stop, enable.
- The back case embedded with a permanent magnet and holder bracket.
- Supports multiple coding: point-to-point, binary, and gray code.
- Based on the functions of FANUC, SIEMENS, MITSUBISHI, FAGOR, BECKHOFF, DELTA, Raspberry Pi and other controllers, it has high compatibility.
- ODM.

尺寸圖 Dimension Drawing

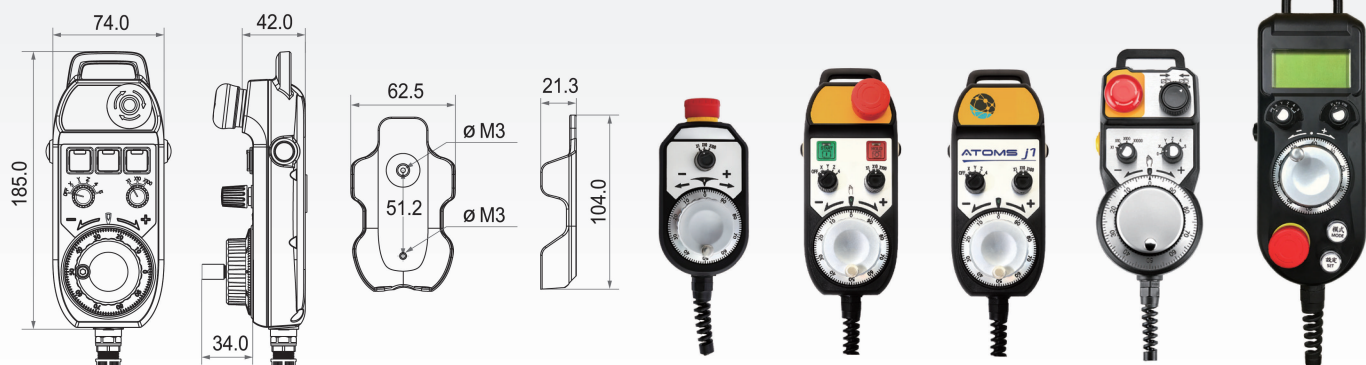

ATOMS J1 產品編號

ATOMS J1 Handy MPG Ordering Information

軸向規格 Axis Coding	倍率規格 Multiplication	軸數 Axis	MPG形式 MPG Specification	急停開關 EMG stop	始能開關 Enable	選配按鍵 Function Button	專利工作燈 Work Light	線長 Cable Length
P 點對點 Point to point	P 點對點 Point to point	2 OFF-X-Y	1 100PPR Pull-up (FANUC)	0 不安裝 (標準) None (Standard)	0 不安裝 (標準) None (Standard)	0 不安裝 (標準) None (Standard)	0 不安裝 (標準) None (Standard)	S 1.5m
B 二進制 Binary	B 二進制 Binary	3 OFF-X-Y-Z	2 25PPR Pull-up (MITSUBISHI)	E 加裝2A (客製化) with EMG (2A) (Customize)	L 左側 (客製化) Left (Customize)	1 ■■■■ (客製化) (Customize)	L 加裝 (客製化) With Light (Customize)	M 3m
G 葛雷碼 Gray code	G 葛雷碼 Gray code	4 OFF-X-Y-Z-4	3 100PPR Line Driver (SIEMENS)		A 左右 (客製化) Both (Customize)	2 ■□■ (客製化) (Customize)		L 5m
		5 OFF-X-Y-Z-4-5	4 100PPR Open circuit +2.2kΩ					
		6 客製Customize	5 100PPR Open Circuit					